

PHILIPS

Professional Lighting



Your **Vision.**
Our **Solutions.**

Effective 1st February, 2021



Proudly illuminating India for more than 90 years



Signify is the world leader in lighting

Founded as Philips in Eindhoven, the Netherlands, we've led the lighting industry with innovations that serve professional and consumer markets for more than 127 years. In 2016, we spun off from Philips, becoming a separate publicly owned company, listed on Amsterdam's Euronext Stock Exchange. We were included in the benchmark AEX index in March 2018.



PHILIPS

Our global brand in professional and consumer lighting

interact

Our Internet of things platform and connected lighting systems

COLORKINETICS

Our inspiring range of high-performance lights to uniquely light up the monuments

Signify proudly markets the best lighting brands in the world and is the world-leader in offering innovative products and sustainable lighting solutions in professional as well as consumer markets.

Contents

Introduction

Indoor Commercial	7
Suspended-Surface Mounted Luminaires	9
Recessed Mounted Luminaires	16
Commercial Battens	23
Downlighters & Spot Lights	24
Track & Spot Lights	29
Cove Lights	33
Trunking	35
Indoor Industrial	37
Highbays	38
LED Bulkhead & WellGlass	43
Industrial Battens	45
Waterproof LED Luminaires	46
InteractPro	48
Outdoor	52
Street Lights	54
Interact City	58
Flood Lights	60
Interact Sports	65
Landscape Lighting	68
Tunnel Lights	75
Architectural Lights	77
Uniflood	83
Solar Lighting	88
Smart Poles	94
Lighting Controls	96
In-house Software Suite	98
LED lamps	68



Philips **LED lighting**

Leading the market today,
transforming the future.

Philips has been designing, developing and manufacturing LED lighting products resulting in a far reaching intellectual property portfolio and more than 20,000 time-tested installations. We have strengthened our leadership position and revenue generation in the LED Lighting market with solutions across segments, offices, retails, industries and public. We are leaders in technology and product performance in the LED lighting industry and are a confident choice of lighting specifiers across the globe.



Indoor Commercial

Suspended-Surface Mounted Luminaires

PureLine Slim Surface & Suspended 60mm/75mm Width

Suspended 60mm/75mm width aluminium extruded linear lighting luminaires with superior white powder coated finish. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
SP780 P LED52S-6500 PSU W6L224 OD SI	9405	24,000/-
SP780 P LED26S-6500 PSU W6L112 OD SI	9405	12,000/-
SP780P LED52S-6500 PSU W7L224 OD SI	9405	25,000/-
SP780 P LED33S-6500 PSU W7L112 OD SI	9405	12,500/-
SP780 X LED44S-6500 PSU W6L224 OD SI	9405	23,000/-
SP780 X LED52S-6500 PSU W6L224 OD SI	9405	23,000/-
SP780 X LED22S-6500 PSU W6L112 OD SI	9405	12,000/-
SP780 X LED26S-6500 PSU W6L112 OD SI	9405	12,000/-
SP780X LED11S-6500 PSU W6L56 OD SI	9405	7,700/-
SP780X LED46S-6500 PSU W7L224 OD SI	9405	24,000/-
SP780X LED52S-6500 PSU W7L224 OD SI	9405	24,000/-
SP780 X LED23S-6500 PSU W7L112 OD SI	9405	12,000/-
SP780 X LED26S-6500 PSU W7L112 OD SI	9405	12,000/-
SP781 P LED66S-6500 PSU W6L224 OD SI	9405	29,000/-
SP781 P LED33S-6500 PSU W6L112 OD SI	9405	15,000/-
SP781 X LED23S-6500 PSU W7L112 OD SI	9405	14,000/-
SP781 X LED27S-6500 PSU W7L112 OD SI	9405	14,500/-
SP781X LED46S-6500 PSU W7L224 OD SI	9405	30,000/-
SP781X LED54S-6500 PSU W7L224 OD SI	9405	30,000/-
SP781 X LED44S-6500 PSU W6L224 OD SI	9405	29,000/-
SP781 X LED54S-6500 PSU W6L224 OD SI	9405	29,000/-
SP781 X LED22S-6500 PSU W6L112 OD SI	9405	14,500/-
SP781 X LED27S-6500 PSU W6L112 OD SI	9405	14,500/-
End Plate SP780 EP60 GREY	9405	275/-
End Plate SP780 EP75 GREY	9405	275/-
ZPH780 N1000	9405	400/-
ZPH780 N1500	9405	450/-
ZPH780 N2000	9405	500/-
ZPH780 1MTR 3C 0.75sq mm Transparent cable	9405	300/-
ZPH780 1MTR 5C 0.75sq mm Transparent cable	9405	450/-

CCT options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

Pureline Slim Connector 60mm

Pureline Slim Family can be conjoined in multiple way like L, +, T, Y etc.




Type	HSN Code	MRP (INR)
SP781X LED44S-6K PSU W6 SI L CONN 22X2	9405	On request
SP780X LED44S-6K PSU W6 SI L CONN 22X2	9405	On request
SP781X LED66S-6K PSU W6 SI T CONN 22X3	9405	On request
SP780X LED66S-6K PSU W6 SI T CONN 22X3	9405	On request
SP781X LED88S-6K PSU W6 SI P CONN 22X4	9405	On request
SP780X LED88S-6K PSU W6 SI P CONN 22X4	9405	On request

Available in DALI also At INR 2000/- additional on fixed output (PSU) MRP.

Pureline Taper

PureLine Taper is an elegant suspended lighting solution with taper end (bottom width of 60mm & top width of 50mm), it also has option of designer end caps which provide design inspiration through geometric patterns. Multiple option of light distribution, run lengths, color options & lumen pack for different application available.



Type	HSN Code	MRP (INR)
SP811P LED33S-6500 PSU W6L120 OD SI	9405	15,000/-
SP810P LED26S-6500 PSU W6L120 OD SI	9405	12,500/-
SP811X LED22S-6500 PSU W6L120 OD SI	9405	15,000/-
SP811X LED27S-6500 PSU W6L120 OD SI	9405	15,000/-
SP810X LED22S-6500 PSU W6L120 OD SI	9405	12,000/-
SP810X LED26S-6500 PSU W6L120 OD SI	9405	12,000/-
SP811P LED66S-6500 PSU W6L240 OD SI	9405	30,000/-
SP810P LED52S-6500 PSU W6L240 OD SI	9405	24,500/-
SP811X LED44S-6500 PSU W6L240 OD SI	9405	30,000/-
SP811X LED54S-6500 PSU W6L240 OD SI	9405	30,000/-
SP810X LED44S-6500 PSU W6L240 OD SI	9405	25,000/-
SP810X LED52S-6500 PSU W6L240 OD SI	9405	25,000/-
SP810 EP GR	9405	300/-
SP810 EP TAPER GR	9405	500/-

CCT Options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.



PureLine Slim Connectors & Decorative Shapes 50mm

Recessed Mounted 50mm aluminium extruded linear fixtures to align the linear lighting layout with the office architecture or create playful environments with shapes like square, hexagon, etc. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
SP780P LED66S-6500 PSU W5 OD WH HX CONN	9405	27,000/-
SP780P LED48S-6500 PSU W5 OD WH X CONN	9405	19,250/-
SP780P LED44S-6500 PSU W5 OD WH SQ CONN	9405	16,000/-
SP780X LED48S-6500 PSU W5 OD WH + CONN	9405	24,500/-
SP780P LED36S-6500 PSU W5 OD WH Y CONN	9405	14,800/-
SP780X LED36S-6500 PSU W5 OD WH T CONN	9405	9,200/-
SP780X LED24S-6500 PSU W5 OD WH L CONN	9405	14,000/-

CCT Options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

PureLine

Extruded Aluminium Suspended Diffused Office Lighting Solutions with up-down light distribution, available in standalone and continuous mounting versions in 4ft & 8ft run lengths.




Type	HSN Code	MRP (INR)
SP680P LED39S 6500 PSU WH L120 S1	9405	8,700/-
SP680X1 LED39S 6500 PSU WH L120 S1	9405	8,700/-
SP680X2 LED39S 6500 PSU WH L120 S1	9405	8,700/-
SP680P LED78S 6500 PSU WH L240 S1	9405	17,000/-
SP680X1 LED78S 6500 PSU WH L240 S1	9405	17,000/-
SP680X2 LED78S 6500 PSU WH L240 S1	9405	17,000/-
SP680P LED34S 6500 PSU WH L120 S1	9405	8,500/-
SP680X1 LED34S 6500 PSU WH L120 S1	9405	8,500/-
SP680X2 LED34S 6500 PSU WH L120 S1	9405	8,500/-
SP680P LED68S 6500 PSU WH L240 S1	9405	16,000/-
SP680X1 LED68S 6500 PSU WH L240 S1	9405	16,000/-
SP680X2 LED68S 6500 PSU WH L240 S1	9405	16,000/-

CCT Options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

PureLine Slim with Mirror Optics

Suspended aluminium extruded linear lighting luminaires with superior anodised finish and mirror optics for excellent glare control. Multiple options of light distribution, run lengths, and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
SP781P LED27S-6500 PSU W6L112 C5 SI	9405	17,000/-
SP781P LED27S-4000 PSU W6L112 C5 SI	9405	17,000/-
SP780P LED26S-6500 PSU W6L112 C5 SI	9405	14,000/-
SP780P LED26S-4000 PSU W6L112 C5 SI	9405	14,000/-
SP781X LED23S-6500 PSU W6L112 C5 SI	9405	17,000/-
SP781X LED23S-4000 PSU W6L112 C5 SI	9405	17,000/-
SP780X LED22S-6500 PSU W6L112 C5 SI	9405	14,000/-
SP780X LED22S-4000 PSU W6L112 C5 SI	9405	14,000/-

CCT Options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

PureLine Slim Suspended 50mm

Suspended 50mm aluminium extruded linear lighting luminaires with superior white powder coated finish. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
SP780P LED52S-6500 PSU W5L226 OD WH	9405	13,782/-
SP780P LED26S-6500 PSU W5L113 OD WH	9405	6,791/-
SP780X LED52S-6500 PSU W5L226 OD WH	9405	19,000/-
SP780X LED44S-6500 PSU W5L226 OD WH	9405	13,582/-
SP780X LED26S-6500 PSU W5L113 OD WH	9405	9,500/-
SP780X LED22S-6500 PSU W5L113 OD WH	9405	6,691/-
SP780X LED12S-6500 PSU W5L56 OD WH	9405	4,594/-

CCT Options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

SmartBrite Linear

SmartBright Linear provides an extremely durable and high efficacy yet cost effective linear solution surface mounted and suspended applications like offices, retail stores, metro stations, etc.



Type	HSN Code	MRP (INR)
SP095V LED40S 865 W7L120 PSU WH	9405	6,000/-
SP095V LED26S 865 W7L120 PSU WH	9405	5,500/-

CCT Options of 5700K and 4000K at the same MRP. DALI option available on request at INR 2000/- additional on MRP.

SmartBrite Surface

Low height general purpose suspended/surface mounted LED luminaire with diffused optics offering perfect illumination for indoor space.



Type	HSN Code	MRP (INR)
SM270C LED 30S 6500 PSU WH	9405	5,500/-
SM270C LED 30S 4000 PSU WH	9405	5,500/-

CCT Options - 4000K, 6500K.

Cirrus Surface

Surface Mounted general purpose square shaped luminaire with low height CRCA housing and high transmittivity diffuser suitable for office application. Available in options of white & grey housing with profiled & flat diffuser.



Type	HSN Code	MRP (INR)
SM365C LED32-6500 PSU OD GR	9405	5,500/-
SM365C LED32-6500 PSU OD WH	9405	5,500/-
SM366C LED32-6500 PSU OD GR	9405	5,500/-
SM366C LED32-6500 PSU OD WH	9405	5,500/-

CCT Options - 4000K, 6500K.

Cirrus Mini Pro

Cirrus Mini Pro is a general lighting application luminaire (with a dimension of 312mm X 312mm), a perfect solution for all surface mount indoor general lighting application.



Type	HSN Code	MRP (INR)
SM200C LED16S 6500 PSU OD WH	9405	3,100/-
SM200C LED15S 4000 PSU OD WH	9405	3,100/-
SM200C LED11S 6500 PSU OD WH	9405	2,450/-
SM200C LED10S 4000 PSU OD WH	9405	2,450/-


CCT Options - 4000K, 6500K.





DaySpace Suspended

DaySpace is a unique 2'X2' LED luminaire suitable for grid ceiling. With options of using the false ceiling tile or back plate of users choice the fixture seamlessly blends into the office environment/architecture and also declutters the ceiling with its unique design.



Type	HSN Code	MRP (INR)
SP740B LED25S/865 W60L60 PSU WH	9405	17,000/-
SP740B LED30S/865 W60L60 PSU WH	9405	18,000/-
SP740B LED36S/865 W60L60 PSU WH	9405	19,000/-
SP740B LED25S/865 W60L60 PSD WH	9405	22,000/-
SP740B LED30S/865 W60L60 PSD WH	9405	23,000/-
SP740B LED36S/865 W60L60 PSD WH	9405	24,000/-

CCT options: 4000K, 6500K, 5700K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

Recessed Mounted Luminaires

DaySpace Recessed

DaySpace is a unique 2'X2' LED luminaire suitable for grid ceiling. With options of using the false ceiling tile or back plate of users choice the fixture seamlessly blends into the office environment/architecture and also declutters the ceiling with its unique design.




Type	HSN Code	MRP (INR)
RC740B LED25S/865 W60L60 PSU WH	9405	13,500/-
RC740B LED30S/865 W60L60 PSU WH	9405	14,500/-
RC740B LED36S/865 W60L60 PSU WH	9405	15,500/-
RC740B LED25S/865 W60L60 PSD WH	9405	19,000/-
RC740B LED30S/865 W60L60 PSD WH	9405	20,000/-
RC740B LED36S/865 W60L60 PSD WH	9405	21,000/-

BP740 L60W60 WH - White Back Plate as an optional additional accessory. CCT Options - 4000K, 6500K, 5700K. Available in DALI also At INR 2000/- additional on fixed output (PSU) MRP.

PowerBalance

Aluminium extruded recessed luminaire with 135mm diffused compartment available both in standalone & continuous options suitable for armstrong techzone ceiling.

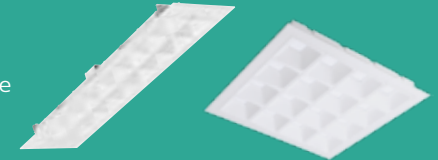

Type	HSN Code	MRP (INR)
RC600B M LED25S-6500 PSU W30L120 WH	9405	11,500/-
RC600B M LED30S-6500 PSU W30L120 WH	9405	12,000/-
RC600B M LED40S-6500 PSU W30L120 WH	9405	12,500/-
RC600B M LED25S-6500 PSD W30L120 WH	9405	14,000/-
RC600B M LED30S-6500 PSD W30L120 WH	9405	14,500/-
RC600B M LED40S-6500 PSD W30L120 WH	9405	15,200/-
RC600B M LED25S-6500 PSU W60L60 WH	9405	11,000/-
RC600B M LED30S-6500 PSU W60L60 WH	9405	11,500/-
RC600B M LED40S-6500 PSU W60L60 WH	9405	12,000/-
RC600B M LED25S-6500 PSD W60L60 WH	9405	14,500/-
RC600B M LED30S-6500 PSD W60L60 WH	9405	15,000/-
RC600B M LED40S-6500 PSD W60L60 WH	9405	15,500/-

CCT Options - 4000K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP. IAO and POE options also available on request.

WingLine

Recessed mounted general purpose square shaped luminaire with high transmittivity diffuser suitable for office application. Available in options of white & grey housing with profiled & flat diffuser.



Type	HSN Code	MRP (INR)
RC480B LED25S/865 W60L60 PSU WH	9405	4,800/-
RC480B LED30S/865 W60L60 PSU WH	9405	4,800/-

CCT Options - 4000K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP. IAO and IAP options also available on request.

CoreView

A unique recessed mounted 2'X2' LED luminaire suitable for grid ceiling with 100% indirect lighting, delivering soft and uniform light for excellent visual comfort.



Type	HSN Code	MRP (INR)
RC 420B M LED 30S 6500 PSU WH	9405	6,000/-
RC 420B M LED 34S 6500 PSU WH	9405	6,500/-
RC 420B M LED 30S 6500 PSD WH	9405	7,000/-
RC 420B M LED 34S 6500 PSD WH	9405	7,500/-

CCT Options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

FullGlow G5

Fully diffused recessed mounted 2'X2' LED luminaire with high transmittive diffuser suitable for indoor spaces.




Type	HSN Code	MRP (INR)
RC380B LED25S-6500 G5 L60W60 PSU OD	9405	4,000/-
RC380B LED30S-6500 G5 L60W60 PSU OD	9405	4,400/-
RC380B LED36S-6500 G5 L60W60 PSU OD	9405	4,800/-
RC380B LED42S-6500 G5 L60W60 PSU OD	9405	5,200/-
RC380B LED25S-6500 G5 L60W60 PSD OD	9405	9,500/-
RC380B LED30S-6500 G5 L60W60 PSD OD	9405	10,000/-
RC380B LED36S-6500 G5 L60W60 PSD OD	9405	10,500/-
RC380B LED42S-6500 G5 L60W60 PSD OD	9405	12,000/-

CCT Options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP. IA, IAO, Step Smart, POE and Tunable White options also available on request.



SoftGlow

Office compliant fully diffused recessed mounted 2'X2' LED Troffer with microprismatic diffuser suitable for indoor spaces



Type	HSN Code	MRP (INR)
RC380B LED36S-6500 G5 L60W60 PSU OD SG	9405	5,800/-
RC380B LED30S-6500 G5 L60W60 PSU OD SG	9405	5,600/-
RC380B LED36S-6500 G5 L60 W60 PSD OD OC	9405	9,000/-

CCT Options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

SmartGlow

SmartGlow is an intelligent office lighting recessed luminaire with built in PIR occupancy sensor offering flexibility of auto switching off when the space is not occupied.



Type	HSN Code	MRP (INR)
RC383B LED 36S-6500 PSU OD WH PIR	9405	6,000/-
RC383B LED 28S-6500 PSU OD WH PIR	9405	6,000/-
RC383B LED 36S-4000 PSU OD WH PIR	9405	6,000/-
RC383B LED 28S-4000 PSU OD WH PIR	9405	6,000/-

Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

PureLine TechZone G2

Pureline Techzone is offered in two versions suitable for 150mm & 100mm technical zones. Sturdy extruded Aluminum housing with Sliding PC diffuser offering uniform lighting distribution. CRCA end Caps and external gear for ease of maintenance.



Type	HSN Code	MRP (INR)
RC810B LED26S 6500 PSU W10L120 OD WH	9405	7,900/-
RC810B LED30S 6500 PSU W10L120 OD WH	9405	7,900/-
RC810X LED20S 6500 PSU W10L120 OD WH	9405	7,900/-
RC810B LED52S 6500 PSU W10L240 OD WH	9405	15,300/-
RC810X LED40S 6500 PSU W10L240 OD WH	9405	15,800/-
RC810B LED26S 6500 PSU W15L120 OD WH	9405	9,100/-
RC810B LED30S 6500 PSU W15L120 OD WH	9405	9,100/-
RC810X LED20S 6500 PSU W15L120 OD WH	9405	9,100/-
RC810B LED52S 6500 PSU W15L240 OD WH	9405	18,200/-
RC810X LED40S 6500 PSU W15L240 OD WH	9405	18,500/-

Accessories

RC810 W10 ENDPLATE		250/-
RC810 W15 ENDPLATE		350/-
RC810 W10L120 ACCESSORY DIFFUSER		300/-
RC810 W10L240 ACCESSORY DIFFUSER		350/-
RC810 W15L120 ACCESSORY DIFFUSER		450/-
RC810 W15L240 ACCESSORY DIFFUSER		500/-

CCT options: 4000K, 5700K and 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP. Interact Office, Interact Pro and POE options also available on request.

PureLine Slim Recessed 60mm/ 75mm

Recessed 60mm/75mm width aluminium extruded linear lighting luminaires with superior anodised aluminium finish. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
RC780B LED52S-6500 PSU W7L240 OD SI	9405	23,000/-
RC780B LED52S-6500 PSU W6L240 OD SI	9405	22,000/-
RC780X LED44S-6500 PSU W7L240 OD SI	9405	23,000/-
RC780X LED44S-6500 PSU W6L240 OD SI	9405	22,000/-
RC780B LED26S-6500 PSU W7L120 OD SI	9405	11,700/-
RC780B LED26S-6500 PSU W6L120 OD SI	9405	11,200/-
RC780X LED22S-6500 PSU W7L120 OD SI	9405	11,700/-
RC780X LED22S-6500 PSU W6L120 OD SI	9405	11,000/-
RC780 EP60 Grey	9405	250/-
RC780 EP75 Grey	9405	250/-

CCT Options - 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP. PSD (DALI), IAO, TWH & POE options also available on request.

PureLine Slim Recessed 50mm

Recessed Mounted 50mm aluminium extruded linear lighting luminaires with superior white powder coated finish. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
RC780B LED52S-6500 PSU W5L226 OD WH	9405	15,000/-
RC780B LED26S-6500 PSU W5L113 OD WH	9405	7,800/-
RC780X LED12S-6500 PSU W5L56 OD WH	9405	4,800/-
RC780X LED22S-6500 PSU W5L113 OD WH	9405	7,600/-
RC780X LED26S-6500 PSU W5L113 OD WH	9405	7,700/-
RC780X LED44S-6500 PSU W5L226 OD WH	9405	14,600/-
RC780X LED52S-6500 PSU W5L226 OD WH	9405	14,700/-

CCT Options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

PureLine TechZone

Aluminium extruded recessed luminaire with 135mm diffused compartment available both in standalone & continuous options suitable for armstrong techzone ceiling.



Type	HSN Code	MRP (INR)
RC820B LED 26S 6500 PSU W15L120 OD SI	9405	8,000/-
RC820B LED 26S 4000 PSU W15L120 OD SI	9405	8,000/-
RC820B LED 52S 4000 PSU W15L240 OD SI	9405	16,000/-
RC820B LED 52S 4000 PSU W15L240 OD SI	9405	16,000/-

CCT Options: 4000K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP. Microprismatic Diffuser also available on request at additional price.

FullGlow 1'x4'

Fully diffused recessed mounted 1'X4' LED luminaire with high transmittive diffuser suitable for indoor spaces.



Type	HSN Code	MRP (INR)
RC380B LED30S-6500 G5 L3W12 PSU OD	9405	6,500/-
RC380B LED36S-6500 G5 L3W12 PSU OD	9405	7,500/-
RC380B LED43S-6500 G5 L3W12 PSU OD	9405	8,500/-

CCT options: 4000K, 6500K, 5700K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

GreenSquare

General purpose recessed mounted 2'X2' LED luminaire with central light exit and profiled CRCA housing for better and soothing light distribution.



Type	HSN Code	MRP (INR)
RC140B LED30S-6500 PSU WH OD	9405	4,400/-
RC140B LED30S-4000 PSU WH OD	9405	4,400/-
RC140B LED30S-6500 PSD WH OD	9405	5,400/-
RC140B LED30S-4000 PSD WH OD	9405	5,400/-
RC140B LED30S-6500 PSR WH OD	9405	5,400/-
RC140B LED30S-4000 PSR WH OD	9405	5,400/-

Cirrus

Recessed mounted general purpose square shaped luminaire with high transmittivity diffuser suitable for office application. Available in options of white & grey housing with profiled & flat diffuser.



Type	HSN Code	MRP (INR)
LED33-6500 PSU OD GR	9405	4,800/-
LED33-6500 PSU OD WH	9405	4,800/-
RC366B LED33-6500 PSU OD GR	9405	4,800/-
RC366B LED33-6500 PSU OD WH	9405	4,800/-

CCT Options - 4000K, 6500K



Commercial Battens

SmartBright

Extruded Aluminium batten available in 2ft & 4ft run length with multiple lumen packages and suitable for Surface, Wall & Conduit mounting (with accessories).



Type	HSN Code	MRP (INR)
BN 021 LED12S 6500 PSU GR	9405	570/-
BN021C LED22S PSU CW GR	9405	850/-
BN 021 LED40S- 6500 PSU GR (4 ft)	9405	1,499/-

Also available in 4000K

Smartbrite Xtra

Extruded Aluminium batten for continuous operation and available in 4ft run length, suitable for Surface, Wall & Conduit mounting (with accessories).



Type	HSN Code	MRP (INR)
BN100C LED40S-6500 PSU L120 GR	9405	1,800/-

Also available in 4000K

Downlighters & Spot Lights

GreenSpace Flex

GreenSpace Flex is a modular range of downlighters, with extremely low glare (UGR <19). The range is available in Narrow (15°), Medium (24°) & Wide Beam (38°) optics, suitable for different applications & ceiling heights.



Type	HSN Code	MRP (INR)
Trims		
RS378Z M102 D150 R-R AJU		4,500/-
RS378Z M87 D130 R-R AJ D		4,000/-
RS378Z M87 D110 R-R FX D		2,700/-
RS378Z M87 D130 R-R AJ		3,600/-
RS378Z M70 D110 R-R AJ D		3,400/-
RS378Z M70 D90 R-R FX D		2,000/-
RS378Z M70 D110 R-R AJ		3,100/-
RS378Z M55 D60 R-R FX		1,400/-
RS378Z M55 D75 R-R FX		1,500/-
RS378Z M55 D75 R-U AJ		1,500/-
RS378Z M55 D75 R-R AJ PH		1,500/-
RS378Z M55 D75 R-R FX PH		1,600/-
RS378Z M55 D75 R-R FX SPH		1,600/-
RS378Z M55 D75 S-S FX WP		1,600/-
RS378Z M55 D70 R-R AJ		1,600/-
RS378Z M55 D75 S-U AJ		1,600/-
RS378Z M55 D75 S-S FX		1,600/-
RS378Z M55 D70 S-R AJ		1,700/-
RS378Z M55 D75 R-R AJ Trim		1,700/-
RS378Z M55 D75 R-U AJ Trim		1,700/-
RS378Z M55 D75 R-R FX PH WP		1,500/-
RS378Z M55 D75 R-R AJ		1,800/-
RS378Z M55 D90 R-R AJ		2,000/-
RS378Z M55 D90 S-R AJ		2,000/-
RS378Z M55 D85 R-R AJ		2,300/-
RS378Z M55 D95 R-R AJ		2,400/-
RS378Z M55 D95 R-R AJ D		2,500/-
RS378Z M55 D78 S-S AJ D		2,800/-
RS378Z M55 D78 R-R AJ D		2,800/-
RS378Z M55 D78 R-R FX D		2,800/-
RS378Z M55 D92 R-R AJ D		3,200/-
RS378Z M55 D92 R-R FX D		3,200/-

Also available in 4000K

Type	HSN Code	MRP (INR)
Trims		
RS378Z M55 D102 R-R AJ D		3,500/-
RS378Z M55 D102 R-R FX D		3,600/-
RS378B MR16 D102 R-R AJ D		4,100/-
RS378B MR16 D102 R-R FX D		4,100/-
RS378B MR16 D78 R-R AJ D		3,700/-
RS378B MR16 D78 R-R FX D		3,700/-
RS378B MR16 D78 S-S AJ D		3,300/-
RS378B MR16 D92 R-R AJ D		3,400/-
RS378B MR16 D92 R-R FX D		3,300/-

Type	HSN Code	MRP (INR)
LED Modules		
RS378B P6 927 PSU-E MB M55		3,000/-
RS378B P6 927 PSU-E NB M55		3,700/-
RS378B P6 927 PSU-E WB M55		4,800/-
RS378B P6 930 PSU-E MB M55		7,000/-
RS378B P6 930 PSU-E NB M55		7,800/-
RS378B P6 930 PSU-E WB M55		9,800/-

Nomenclature for LED Modules Pxy=xy Watts (P6=6W). CCT Options of 2700K, 3000K & 4000K available with 90CRI in all LED modules. Options of NB, MB and WB available in all LED modules

LuxSpace Pro

LuxSpace Pro is a deep recessed downlighter range with extremely low glare (UGR <19) & high quality faceted reflector for superior lighting and aesthetics. The range is available in Medium (32°) & Wide Beam (65°) optics for both standard and high ceiling applications.



Type	HSN Code	MRP (INR)
DN590B M LED6S-6500 PSU WH WB		4,000/-
DN590B M LED6S-6500 PSU WH MB		4,000/-
DN590B M LED10S-6500 PSU WH WB		4,000/-
DN590B M LED10S-6500 PSU WH MB		4,000/-
DN590B M LED15S-6500 PSU WH WB		4,000/-
DN590B M LED15S-6500 PSU WH MB		4,000/-
DN590B M LED20S-6500 PSU WH WB		4,000/-
DN590B M LED20S-6500 PSU WH MB		4,000/-

CCT Options - 3000K, 4000K, 5700K & 6500K. Available in DALI also at INR 3500/- additional on fixed output (PSU) MRP. MB and WB options available for all lumen packs. Tunable White, Interact Pro, POE and IP54 options also available on request.

GreenPerform Sleek

GreenPerform Sleek is a high performance low-height LED downlighter suited for requirements of any modern professional workspace. Robust PDC housing ensures long system. Narrow rim renders a pleasing aesthetic look.



Type	HSN Code	MRP (INR)
DN295B LED6S-6500 PSU WH	9405	1,400/-
DN295B LED8S-6500 PSU WH	9405	1,550/-
DN295B LED10S-6500 PSU WH	9405	1,700/-
DN296B LED12S-6500 PSU WH	9405	2,100/-
DN296B LED15S-6500 PSU WH	9405	2,500/-
DN296B LED20S-6500 PSU WH	9405	3,000/-

CCT Options: 4000K, 5700K, 3000K. Available in DALI also At INR 3500/- additional on fixed output (PSU) MRP. Office Compliant variant with UGR<19 - Soft Glow (SG). (MRP-INR 500/- additional for SG Option)

Sleek Surface Downlight

Slim profile surface mounted downlight with options of 700 to 2000 lumen.



Type	HSN Code	MRP (INR)
SM250C LED7S- 6500 PSU WH	9405	1,100/-
SM250C LED12S- 6500 PSU WH	9405	1,200/-
SM251C LED16S- 6500 PSU WH	9405	1,750/-
SM250C LED12S- 6500 PSU WH	9405	1,200/-
SM251C LED20S- 6500 PSU WH	9405	1,950/-

Available in Round and Square form factors in 3000K and 4000K.

ArchSpace

ArchSpace is the perfect choice when it comes to surface and suspended cylindrical downlighting applications such as those in Retail, Offices, Hotels, Lobbies and School/ Universities etc. With its differentiated aesthetics with extruded aluminium housing and a superior powder coated finish, multiple choices of lumen packs, two diameters, flexible height*, uniform lighting distribution and superior features of Driver make ArchSpace an undisputed winner when it comes to the surface/ cylindrical downlight category.



Type	HSN Code	MRP (INR)
SP320P LED6S-6500 PSU DIA100 WH		4,100/-
SP320P LED10S-6500 PSU DIA100 WH		4,300/-
SP320P LED15S-6500 PSU DIA100 WH		4,600/-
SP320P LED20S-6500 PSU DIA100 WH		4,800/-
SP320P LED6S-6500 PSU DIA80 WH		3,800/-
SP320P LED10S-6500 PSU DIA80 WH		4,100/-
SP320P LED15S-6500 PSU DIA80 WH		4,300/-
SP320P LED20S-6500 PSU DIA80 WH		4,600/-

Available in black housing color at the same MRP. Available in CCT options of 3000K, 4000K and 6500K at the same MRP

GreenLED Ultima Square

Ultra sleek recessed downlight for low height false ceiling in square profile.



Type	HSN Code	MRP (INR)
DN096B LED6S-6500 PSU WH	9405	1,580/-
DN097B LED10S-6500 PSU WH	9405	1,980/-

Also available in 3000K and 4000K

GreenLED Ultima Round

Ultra sleek recessed downlight for low height false ceiling in round profile.



Type	HSN Code	MRP (INR)
DN091B LED6S-6500 PSU WH	9405	1,580/-
DN092B LED10S-6500 PSU WH	9405	1,980/-

Also available in 3000K and 4000K

SkySpot COB

- New series of LED Spot fixtures specially designed for commercial use
- Ideal for retail showrooms, hospitality, offices
- Elegant fixed spot with a focused 36 degree beam angle
- Long life with 30,000 burning hours with CRI>80
- Wide choice: Available in 7/12/18/22W, Round, 3000K & 6500K



Type	HSN Code	MRP (INR)
7W Sky Spot COB (WW)	9405	1,415/-
7W Sky Spot COB (CW)	9405	1,415/-
12W Sky Spot COB (WW)	9405	1,415/-
12W Sky Spot COB (CW)	9405	1,765/-
18W Sky Spot COB (WW)	9405	1,765/-
18W Sky Spot COB (CW)	9405	1,765/-
22W Sky Spot COB (WW)	9405	2,200/-
22W Sky Spot COB (CW)	9405	2,200/-

Green LED I

- High performance LED Downlights for commercial applications
- 100 lumen / watt efficacy
- Efficient heat sink (die cast) with Steel clips
- Integrated driver control (for easy installation)



Type	HSN Code	MRP (INR)
DN191B LED6S-3000 PSU WH S2	9405	1,415/-
DN191B LED6S-4000 PSU WH S2	9405	1,415/-
DN191B LED6S-6500 PSU WH S2	9405	1,415/-
DN192B LED10S-3000 PSU WH S2	9405	1,765/-
DN192B LED10S-4000 PSU WH S2	9405	1,765/-
DN192B LED10S-6500 PSU WH S2	9405	1,765/-
DN193B LED12S-3000 PSU WH S2	9405	2,200/-
DN193B LED12S-4000 PSU WH S2	9405	2,200/-
DN193B LED12S-6500 PSU WH S2	9405	2,200/-
DN194B LED16S-3000 PSU WH S2	9405	2,750/-
DN194B LED16S-4000 PSU WH S2	9405	2,750/-
DN194B LED16S-6500 PSU WH S2	9405	2,750/-
DN195B LED20S-3000 PSU WH S2	9405	3,300/-
DN195B LED20S-4000 PSU WH S2	9405	3,300/-
DN195B LED20S-6500 PSU WH S2	9405	3,300/-



Track & Spot Lights

Style State Track

Track mounted accent lighting luminaire with no external gear box and magnetic hinge arrangement for easy aiming and perfect punch in the beam.



Type	HSN Code	MRP (INR)
ST916T LED20/940 PSU 1C MB BK IN	9405	15,000/-
ST916T LED20/940 PSU 1C NB BK IN	9405	15,000/-
ST916T LED20/940 PSU 1C WB BK IN	9405	15,000/-



EcoAccent Track

Track mounted accent lighting luminaire in pressure diecast housing with two options of lumen pack. Track of 1M and 2M available to be ordered separately.



Type	HSN Code	MRP (INR)
ST271T LED20/830 PSU-E NB 1C BK	9405	6,500/-
ST271T LED20/830 PSU-E MB 1C BK	9405	6,500/-
ST271T LED20/830 PSU-E WB 1C BK	9405	6,500/-
ST271T LED20/840 PSU-E MB 1C BK	9405	6,500/-
ST271T LED20/850 PSU-E MB 1C BK	9405	6,500/-
ST271T LED20/830 PSU-E MB 1C WH	9405	6,500/-
ST271T LED20/840 PSU-E MB 1C WH	9405	6,500/-
ST271T LED20/840 PSU-E WB 1C BK	9405	6,500/-
ST271T LED20/850 PSU-E WB 1C BK	9405	6,500/-
ST271T LED20/840 PSU-E NB 1C BK	9405	6,500/-
ST271T LED40/830 PSU-E NB 1C BK	9405	7,000/-
ST271T LED40/830 PSU-E WB 1C BK	9405	7,000/-
ST271T LED40/840 PSU-E NB 1C BK	9405	7,000/-
ST271T LED40/840 PSU-E MB 1C BK	9405	7,000/-
ST271T LED40/840 PSU-E WB 1C BK	9405	7,000/-
ST271T LED40/850 PSU-E MB 1C BK	9405	7,000/-
ST271T LED40/850 PSU-E WB 1C BK	9405	7,000/-
ST271T LED40/840 PSU-E MB 1C WH	9405	7,000/-
ST271T LED40/830 PSU-E MB 1C WH	9405	7,000/-
ST271T LED40/850 PSU-E NB 1C BK	9405	7,000/-

Essential Smart Bright Track Lights

Essential SmartBright Track Light range is a high performance, hassle free solution for up to 5 years of use. Range has high efficacy of up to 100 lm/W, and Aluminum housing for better thermal management. Available in black & white color housing.



Type	HSN Code	MRP (INR)
ST030T LED8/830 8W 220-240V I MB WH		1,750/-
ST030T LED8/830 8W 220-240V I NB WH		1,750/-
ST030T LED12/830 14W 220-240V I MB WH		2,000/-
ST030T LED12/830 14W 220-240V I NB WH		2,000/-
ST030T LED20/830 23W 220-240V I MB WH		2,250/-
ST030T LED20/830 23W 220-240V I NB WH		2,250/-
ST030T LED30/830 35W 220-240V I MB WH		2,500/-
ST030T LED30/830 35W 220-240V I NB WH		2,500/-

CCT Options: 4000K, 5000K, 3000K. Color Options - White, Black.

TrueFashion Tracks

TrueFashion is a dedicated spot family answering to the specific needs of Fashion retailers. These miniaturized spots with clean and fine detailing offer contemporary design and blend seamlessly into the store interior. TrueFashion provides the best quality of light by using lenses to optimize the contrasts within the store.



Type	HSN Code	MRP (INR)
ST700T LED10 930PW PSD VLC NB WH IN	9405	18,500/-
ST700T LED20 940PW PSD VLC MB WH IN	9405	18,500/-
ST700T LED20 930PC PSU NB 1C WH IN	9405	7,900/-
ST700T LED20 930PC PSU MB 1C WH IN	9405	7,900/-
ST700T LED20 930PC PSU WB 1C WH IN	9405	7,900/-
ST700T LED30 930PC PSU MB 1C WH IN	9405	9,600/-
ST700T LED30 930PC PSU WB 1C WH IN	9405	9,600/-
ST700T LED40 930PC PSU MB 1C WH IN	9405	10,000/-
ST700T LED40 930PC PSU WB 1C WH IN	9405	10,000/-
ST700T LED20 930PC PSU MB 1C WH HB IN	9405	7,900/-
ST700T LED40 930PC PSU MB 1C WH HB IN	9405	11,000/-
ST700T LED30 930PW PSU MB 3C WH IN	9405	9,000/-
ST700T LED30 930PW PSU WB 3C WH IN	9405	9,000/-
ST700T LED30 930PW PSD VLC MB WH IN	9405	18,500/-
ST700T LED30 930PW PSD VLC WB WH IN	9405	18,500/-
ST700T LED10 930PC PSU NB 1C WH IN	9405	8,400/-
ST700T LED10 930PC PSU MB 1C WH IN	9405	8,400/-
ST700T LED10 930PC PSU WB 1C WH IN	9405	8,400/-

Housing color options of white and black. DALI and VLC options also for specific SKUs

EcoAccent

Recessed mounted Accent Lighting luminaire with diecast aluminum heat sink and sand grain finishing reflector, available in two lumen packs with option of DALI dimmable driver.



Type	HSN Code	MRP (INR)
RS271B LED20/830 PSU-E NB WH	9405	6,500/-
RS271B LED20/830 PSU-E MB WH	9405	6,500/-
RS271B LED20/830 PSU-E WB WH	9405	6,500/-
RS271B LED20/840 PSU-E NB WH	9405	6,500/-
RS271B LED20/840 PSU-E MB WH	9405	6,500/-
RS271B LED20/840 PSU-E WB WH	9405	6,500/-
RS271B LED20/850 PSU-E NB WH	9405	6,500/-
RS271B LED20/850 PSU-E MB WH	9405	6,500/-
RS271B LED20/850 PSU-E WB WH	9405	6,500/-
RS271B LED40/830 PSU-E MB WH	9405	6,500/-
RS271B LED40/830 PSU-E WB WH	9405	6,500/-
RS271B LED40/840 PSU-E MB WH	9405	6,500/-
RS271B LED40/840 PSU-E WB WH	9405	6,500/-
RS271B LED40/850 PSU-E MB WH	9405	6,500/-
RS271B LED40/850 PSU-E WB WH	9405	6,500/-
RS271B LED20/850 PSD NB WH	9405	7,500/-
RS271B LED20/840 PSD NB WH	9405	7,500/-
RS271B LED20/830 PSD NB WH	9405	7,500/-
RS271B LED20/850 PSD MB WH	9405	7,500/-
RS271B LED20/840 PSD MB WH	9405	7,500/-
RS271B LED20/830 PSD MB WH	9405	7,500/-
RS271B LED20/850 PSD WB WH	9405	7,500/-
RS271B LED20/840 PSD WB WH	9405	7,500/-
RS271B LED20/830 PSD WB WH	9405	7,500/-
RS271B LED40/850 PSD MB WH	9405	8,000/-
RS271B LED40/840 PSD MB WH	9405	8,000/-
RS271B LED40/830 PSD MB WH	9405	8,000/-
RS271B LED40/850 PSD WB WH	9405	8,000/-
RS271B LED40/840 PSD WB WH	9405	8,000/-
RS271B LED40/830 PSD WB WH	9405	8,000/-



Retail – Coves Lights

Cove Lights

Flex Cove G4

FlexCove G4 LED Strip is the professional solution, ideal for application in retail, hospitality & offices. Available in IP20 & IP44 versions, with long system life of 30,000 burning hours. Mounting accessories including Al channel, PC diffuser, leader cable & mounting clips available for order separately. *Driver to be ordered separately.



Type	HSN Code	MRP (INR)
LED Strips		
LS170S LED4 827 IP20 L5000		2,800/-
LS170S LED8 827 IP20 L5000		3,000/-
LS170S LED12 827 IP20 L5000		3,200/-
LS170S LED16 827 IP20 L5000		3,500/-
LS170S LED4 827 IP44 L5000		3,400/-
LS170S LED8 827 IP44 L5000		3,600/-
LS170S LED12 827 IP44 L5000		3,800/-
LS170S LED16 827 IP44 L5000		4,400/-
LS170S LED4 927 IP20 L5000		3,000/-
LS170S LED8 927 IP20 L5000		3,200/-
LS170S LED12 927 IP20 L5000		3,400/-
LS170S LED16 927 IP20 L5000		4,000/-
LS170S LED4 927 IP44 L5000		3,600/-
LS170S LED8 927 IP44 L5000		3,800/-
LS170S LED12 927 IP44 L5000		4,200/-
LS170S LED16 927 IP44 L5000		4,600/-
LS170S LED9 TNW IP44 L5000		11,000/-
LS170S LED10 TNW IP44 L5000		6,400/-

Type	HSN Code	MRP (INR)
Mounting Accessories		
AC170Z PC-OP L1000		300/-
AC170Z TR-U L1000		400/-
AC170Z TR-V L1000		500/-
AC170Z PC-OP L1000 TW		300/-
AC170Z TR-U L1000 TW		400/-
AC170Z TR-V L1000 TW		500/-
AC170Z Mounting Clip		40/-
AC170Z Mounting Clip WP		40/-
AC170Z End Cap		20/-
AC170Z End Cap TW		20/-
AC170Z Connector		100/-
AC170Z Connector TW		100/-
AC170Z Connector with Leader Cable L		100/-
AC170Z Connector with Leader Cable H		100/-
AC170Z Connector with Leader Cable TW		100/-

CCT Options with CR180 - 2400K, 2700K, 4000K, 6500K in both IP20 and IP44. CCT Options with CR190 - 2400K only in IP20 and IP44. Tunable White Option in IP44



SkyCove LED Strip

New 5 meter LED Strip especially designed for commercial use.

- Ideal for retail showrooms, hospitality & offices
- Driver included in pack (24W output)
- Long life with 20,000 hours
- Available in 3000K & 6500K



Type	HSN Code	MRP (INR)
LED Strip SKYCove 5M WW with driver	9405	1,540/-
LED Strip SKYCove 5M CDL with driver	9405	1,540/-

Trunking

Optimus LED Trunking

Trunking based solution for large open areas with high ceiling requiring continuous linear installation. Luminaire is snap fit mount on trunking system, available in two lumen packs. Accessories need to be additionally ordered.



Type	HSN Code	MRP (INR)
LL199X 1XDLED40-6500 PSE OD WH S1	9405	4,500/-
LL199X 1XDLED40-4000 PSE OD WH S1	9405	4,500/-
LL199X 1XDLED40-3000 PSE OD WH S1	9405	4,500/-
LL199X 1XDLED57-3000 PSE OD WH	9405	6,200/-
LL199X 1XDLED57-4000 PSE OD WH	9405	6,200/-
LL199X 1XDLED57-6500 PSE OD WH	9405	6,200/-
TTX199/03LED	9405	3,000/-
TTX199/01 LED	9405	1,000/-
ZTX199 BC LED	9405	350/-
ZTX200 SMS	9405	600/-
ZTX200 EP	9405	120/-

Also available in IP54 version on request.



Indoor Industrial



Highbays

GreenPerform Prime

GreenPerform Prime is a new age highbay range that offers an industry leading efficacy of 150 lm/W specially designed to deliver unmatched performance in adverse industrial environments with its robust housing design and cater to diverse applications with multiple options of beam angles.



Type	HSN Code	MRP (INR)
BY515P LED100S 5700 NB PSU GR	9405	13,000/-
BY515P LED150S 5700 NB PSU GR	9405	15,000/-
BY515P LED200S 5700 NB PSU GR	9405	17,000/-
BY515P LED250S 5700 NB PSU GR	9405	22,000/-

CCT Options of 5700K and 4000K at the same MRP. Beam Angles Available: NB 60° - 10000 lm, 15000 lm, 20000 lm & 25000 lm | WB 110° - 10000 lm & 15000 lm | ENB 30° - 25000 lm

GreenPerform Elite Highbay

Awarded with IF Design and Red Dot Design Awards in 2019, GreenPerform Elite Highbay is a power pack of superior performance, best in class efficacy and unmatched product design.



Type	HSN Code	MRP (INR)
BY718P LED100/CW PSU NB IN	9405	14,000/-
BY718P LED150/CW PSU NB IN	9405	18,000/-
BY718P LED200/CW PSU NB IN	9405	20,000/-
BY718P LED250/CW PSU NB IN	9405	22,000/-
BY718P LED300/CW PSU NB IN	9405	24,000/-

CCT Options CW and NW. Beam angle options NB and WB. Also available in DALI and connected Interact Industry options on request.

DuraLED Highbay

IP66 & IK08 protected LED Highbay solution with PDC housing, toughened & shattered proof glass available in both Narrow & Wide beam optics.



Type	HSN Code	MRP (INR)
BY325P LED100S CW PSU GR FG NB XTFCL V1	9405	12,000/-
BY325P LED100S CW PSU GR FG WB XTFCL V1	9405	12,000/-
BY325P LED130S CW PSU GR FG NB XTFCL V1	9405	14,500/-
BY325P LED130S CW PSU GR FG WB XTFCL V1	9405	14,500/-
BY325P LED160S CW PSU GR FG NB XTFCL V1	9405	17,000/-
BY325P LED160S CW PSU GR FG WB XTFCL V1	9405	17,000/-
BY325P LED195S CW PSU GR FG NB XTFCL V1	9405	22,000/-
BY325P LED195S CW PSU GR FG WB XTFCL V1	9405	22,000/-

Durabay Prime

Durabay Prime is IP66 & IK08 protected next gen highbay solution with PDC housing, delivers uniform light distribution with both NB &WB optics.



Type	HSN Code	MRP (INR)
BY225P LED100S CW NB PSU FG GR V1	9405	12,000/-
BY225P LED100S CW WB PSU FG GR V1	9405	12,000/-

Also available in 13500 lumen

Maxolid

IP65, PDC LED Highbay with circular form factor and available in both Narrow & Wide beam optics options of toughened glass & PC cover to choose from.



Type	HSN Code	MRP (INR)
BY415P LED145S CW HE NB FG PSU GR XTFCL S5	9405	18,000/-
BY415P LED145S CW HE WB FG PSU GR XTFCL S5	9405	18,000/-
BY415P LED145S CW NB FG PSD GR S5	9405	19,000/-
BY415P LED145S CW WB FG PSD GR S5	9405	19,000/-
BY415P LED145S CW NB PC PSU GR S5	9405	18,000/-
BY415P LED145S CW WB PC PSU GR S5	9405	18,000/-
BY415P LED145S CW NB PC PSD GR S5	9405	19,000/-
BY415P LED145S CW WB PC PSD GR S5	9405	19,000/-
BY415P LED160S CW HE NB FG PSU GR XTFCL S5	9405	22,000/-
BY415P LED160S CW HE WB FG PSU GR XTFCL S5	9405	22,000/-
BY415P LED160S CW NB FG PSD GR S5	9405	23,000/-
BY415P LED160S CW WB FG PSD GR S5	9405	23,000/-
BY415P LED275S CW PSU GR FG NB XTFCL V1	9405	25,500/-
BY415P LED275S CW PSU GR FG WB XTFCL V1	9405	25,500/-
BY415P LED240S CW PSU GR FG NB XTFCL V1	9405	24,500/-
BY415P LED240S CW PSU GR FG WB XTFCL V1	9405	24,500/-

Also available in 4000K CCT

Maxolid NI

Non integral IP65, PDC LED Highbay with circular form factor and available in both Narrow & Wide beam optics, options of toughened glass & PC cover to choose from.



Type	HSN Code	MRP (INR)
BY416P LED240S CW SK60 FG GR NI S5	9405	20,000/-
BY416P LED240S CW SY20 FG GR NI S5	9405	20,000/-
ZVS431 2x100W PSU XTFCL	9405	5,000/-
ZVS431 2x100W PSU XTFCL(IP65)	9405	7,500/-



GreenUp

Greenup is a Liner highbay solution with three different optics option(NB,WB & HRO-High rack Optic) makes it apt for wide application areas in industry, warehouse & retail.



Type	HSN Code	MRP (INR)
BY560P LED105/CW PSU WB IN	9405	11,500/-
BY560P LED105/CW PSU HRO IN	9405	12,500/-
BY560P LED160/CW PSU WB IN	9405	16,500/-
BY560P LED160/CW PSU NB IN	9405	16,500/-
BY560P LED160/CW PSU HRO IN	9405	17,500/-
BY560P LED210/CW PSU WB IN	9405	20,000/-
BY560P LED210/CW PSU NB IN	9405	20,000/-
BY560P LED210/CW PSU HRO IN	9405	21,000/-

DALI version available in selective lumen category

Mini 200

Mini 200 is an intuitive under canopy luminaire suitable for petrol station, sport complex, community center lighting. It has PDC housing, IP66 & IK08 protection & precision control optics- choice of both Symmetric & Asymmetric version available.



Type	HSN Code	MRP (INR)
BY286V LED90S CW SK PSU FG WH	9405	11,000/-
BY286V LED90S CW AK PSU FG WH	9405	11,000/-
BY286V LED85S CW SK PSU FG WH	9405	10,000/-
BY286V LED85S CW AK PSU FG WH	9405	10,000/-

GreenBay

Versatile Highbay family designed to address Recessed and Suspended Lighting application in Industries with multiple options of optics. Mounting accessories to be ordered separately.



Type	HSN Code	MRP (INR)
BY400V LED72S CW AK PSU S2 FG WH	9405	13,500/-
BY400V LED145S CW AK PSU S2 FG WH	9405	18,500/-
BY400V LED72S CW SK PSU S2 FG WH	9405	13,500/-
BY400V LED110S CW SK PSU S2 FG WH	9405	16,500/-
BY400V LED145S CW SK PSU S2 FG WH	9405	18,500/-
BY400V LED72S CW SY60 PSU S2 FG WH	9405	13,500/-
BY400V LED110S CW SY60 PSU S2 FG WH	9405	16,500/-
BY400V LED145S CW SY60 PSU S2 FG WH	9405	18,500/-
BY400V LED72S CW SY110 PSU S2 FG WH	9405	13,500/-
BY400V LED110S CW SY110 PSU S2 FG WH	9405	16,500/-
BY400V LED145S CW SY110 PSU S2 FG WH	9405	18,500/-
BY400V LED110S CW AK PSU S2 FG WH	9405	16,500/-
AC400Z WH	9405	800/-
AC400B WH-RECESS	9405	1,600/-
AC400C WH-SURFACE	9405	1,800/-
AC400P WH-SUSPENDED	9405	3,500/-

EnduraLED Midbay

Robust & reliable IP66 & IK08 protected LED midbay with PDC housing & toughened glass suitable for ceiling (Surface/Suspended) mount & available in Wide beam (Rotational Symmetric) optics.



Type	HSN Code	MRP (INR)
BY150P LED76S CW PSU HE SY120 FG GR	9405	9,500/-
BY150P LED76S CW PSU HE SY120 FG GR LILO	9405	10,000/-



LED Bulkhead & Wellglass

DuraLED WellGlass G2

New Gen2 of DuraLED WellGlass with improved lumen efficacy and lumen packs upto 4200lm with Single piece pressure die cast aluminium Wellglass, high quality PC diffuser and has multiple mounting options available (Wall, Ceiling, Eyebolt & Cradle).



Type	HSN Code	MRP (INR)
BY300P LED31 757 PSU PC IN S2	9405	4,500/-
BY300P LED31 757 PSU PC IN S2 LILO	9405	5,000/-
BY300P LED31 757 PSU PC IN S2 SPD	9405	5,500/-
BY300P LED37 757 PSU PC IN S2	9405	5,000/-
BY300P LED37 757 PSU PC IN S2 LILO	9405	5,500/-
BY300P LED37 757 PSU PC IN S2 SPD	9405	6,000/-
BY300P LED42 757 PSU PC IN S2	9405	5,500/-
BY300P LED42 757 PSU PC IN S2 LILO	9405	6,000/-
BY300P LED42 757 PSU PC IN S2 SPD	9405	6,500/-

CCT Options of 4000K & 5700K

DuraLED WellGlass

Single piece pressure die cast aluminium Wellglass with high quality PC diffuser and has multiple mounting options available (Wall, Ceiling, Eyebolt & Cradle).



Type	HSN Code	MRP (INR)
BY300P LED 27S CW PSU S1 PC	9405	4,500/-
BY300P LED 27S CW PSU S1 PC LILO	9405	5,000/-
BY300P LED 27S CW PSU S1 PC SPD	9405	5,500/-
BY300P LED 37S CW PSU S1 PC	9405	5,000/-
BY300P LED 37S CW PSU S1 PC LILO	9405	5,500/-
BY300P LED 37S CW PSU S1 PC SPD	9405	6,000/-

Also available in NW & WW

EnduraLED WellGlass

Robust & reliable IP66 & IK08 protected LED Wellglass luminaire with PDC housing & polycarbonate diffuser suitable for Wall & Ceiling mounting application.



Type	HSN Code	MRP (INR)
BY201P LED78S CW PSU HE PC	9405	7,200/-

LILO option available on demand.

EnduraLED Bulkhead

Pressure Die cast housing LED bulkhead with IP66 Protection and IK09 impact resistance suitable for surface and wall mounting applications.



Type	HSN Code	MRP (INR)
WT202W LED6S NW PSU S2 PC	9405	1,600/-
WT202W LED6S CW PSU S2 PC	9405	1,600/-

VistaGlow

Robust & reliable LED bulk head with IP65 Protection & IK08 impact resistance suitable for surface and wall mounting applications.



Type	HSN Code	MRP (INR)
WT140W LED7S CW PSU S1 PC	9405	999/-
WT140W LED7S NW PSU S1 PC	9405	999/-



Industrial Battens

EnduraLED Next

Flicker free, high efficiency and robust industrial batten family suitable for Surface, Wall and Conduit mounting. The product family offers dimmable and connected batten option.



Type	HSN Code	MRP (INR)
BN308C LED20S-6500 L60 PSU WH	9405	1,900/-
BN308C LED20S-6500 L120 PSU WH	9405	1,950/-
BN308C LED40S-6500 L120 PSU WH	9405	3,200/-
BN308C LED60S-6500 L120 PSU WH	9405	4,400/-
BN308C LED40S-6500 L120 PSD WH	9405	4,500/-
BN308C LED20S-6500 L120 PIR WH	9405	2,950/-
BN308C LED40S-6500 L120 PIR WH	9405	4,200/-
BN308C LED60S-6500 L120 PIR WH	9405	5,400/-
Mounting Accessories		
AC308C MB S/A	9405	100/-
AC308P MB S/A	9405	100/-

Also available in 4000K & interact ready platform variant

TMC 501

Mounting rail for TLED lamps.



Type	HSN Code	MRP (INR)
TMC 501 P 1xT-LED 22W P3241	9405	500/-
TMC 501 P 2xT-LED 22W P3242	9405	600/-



Waterproof LED Luminares

Smartbright Waterproof

IP65, Dust and Waterproof LED luminaire with Polycarbonate Housing suitable for wall & ceiling mount applications.



Type	HSN Code	MRP (INR)
WT201C LED44S-6500 PSU L120	9405	4,000/-
WT201C LED24S-6500 PSU L120	9405	3,000/-

Also available in 4000K

Essential SmartBright IP65 Batten

Essential SmartBright Batten provides the opportunity to the customers to upgrade to a superior quality IP65 batten assuring high performance in harsh industrial environments.



Type	HSN Code	MRP (INR)
WT150C LED 20S 6500 PSU L120	9405	2,800/-
WT150C LED 20S 4000 PSU L120	9405	2,800/-
WT150C LED 40S 6500 PSU L120	9405	3,800/-
WT150C LED 40S 4000 PSU L120	9405	3,800/-

Waterproof LED Luminaire

Surface/Suspended Mounted waterproof (IP65) luminaire suitable for single and twin T8 TLED lamps.



Type	HSN Code	MRP (INR)
TCW450 P 1XTLED 19W P3397	9405	2,200/-
TCW450 P 2XTLED 19W P3397	9405	2,500/-

PureSpace Clean Room Range

PureSpace is a comprehensive Cleanroom luminaires range with options for bottom opening, top opening, 2'x2' as well 1'x4'.



Type	HSN Code	MRP (INR)
CR652B LED60S-6500 PSU CA TO W30L120 WH	9405	18,000/-
CR652B LED36S-6500 PSU CA BO W30L120 WH	9405	15,000/-
CR652B LED36S-6500 PSU CA TO W60L60 WH	9405	13,000/-
CR652B LED60S-6500 PSU CA TO W60L60 WH	9405	16,000/-
CR652B LED80S-6500 PSU CA TO W60L60 WH	9405	18,000/-
CR652B LED36S-6500 PSU CA BO W60L60 WH	9405	12,500/-
CR652B LED60S-6500 PSU CA BO W60L60 WH	9405	15,000/-
CR652B LED80S-6500 PSU CA BO W60L60 WH	9405	17,500/-

CCT Options 6500K and 4000K. Also available in DALI option at additional INR 3000/- on MRP.

interact Pro


An intuitive app and dashboard that works with Philips InterAct Ready lamps and luminaires to bring the power of IoT.

Lights. Insights. Action.

It enables you to both control and receive data from the LED light points and sensors within the connected lighting system. You can program and automate light settings, while collecting data on where and how you use lighting. It's intuitive to set up and use. And it's the smart way to optimize energy savings.

How the connected lighting system comes together.

The **Interact Pro dashboard and app** work with a range of Philips luminaires and lamps and a set of wireless switches and sensors that are Interact Ready. You can customize the software's settings for specific workspaces. Whether you're connecting 20 light points or 200, Interact Pro helps everyone to work smarter.

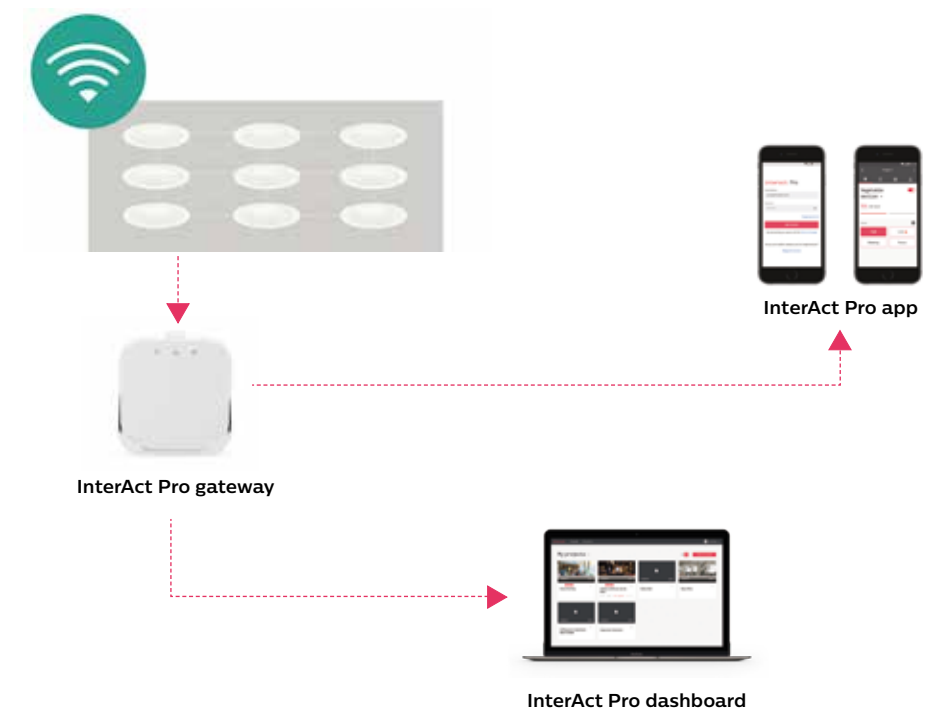

Interact Pro connected
lighting dashboard and app



Key benefits:

- Power of Personalization
- Energy usage Dashboards with failure reports
- Fast installation, no cables

How is InterAct unique?

InterAct Pro is a truly unique offering today in the market and suits all your lighting needs- whether you are building a new small office or a retail shop, or you are planning an upgrade from your existing Conventional Lighting to LED Lighting system (retrofit).

Completely Wireless Setup

Organizations today are specifically constrained in a retrofit setup to explore the benefits of connected lighting, as it requires wiring, layout changes and a deep renovation leading to significant work downtime. InterAct Pro is a completely wireless solution and hence does not require any new wirings or changes in your workplace.

Power of Simplicity

System complexity often scares organizations and workplace leaders to completely explore the benefits of connected lighting and this is specifically true for small spaces. With its Intuitive App and commissioning simplicity, InterAct Pro provides a unique connected platform.

Philips Interact Ready connected lighting

InterAct Pro software is designed to be affordable for small spaces. It works with any Philips Lighting connected LED lamps and luminaires that are Interact Ready. Sensors and wall switches are interoperable and upgradeable, meaning you're prepared for any changes the future might throw at you.

You can start saving energy straight away, with direct point-for-point replacement of conventional lights.



Type	HSN Code	MRP (INR)
DN395B LED20S-6500 IA WH	9405	6,000/-
DN395B LED20S-4000 IA WH	9405	6,000/-
DN395B LED20S-3000 IA WH	9405	6,000/-
RS271B LED40S-4000 IA MB WH	9405	8,500/-
RS271B LED40S-3000 IA MB WH	9405	8,500/-
RS271B LED20S-4000 IA MB WH	9405	8,000/-
RS271B LED20S-3000 IA MB WH	9405	8,000/-
RS271B LED40S-4000 IA WB WH	9405	8,500/-
RS271B LED40S-3000 IA WB WH	9405	8,500/-
RS271B LED20S-4000 IA WB WH	9405	8,000/-
RS271B LED20S-3000 IA WB WH	9405	8,000/-
RC380B LED36S-4000 IA W60L60 G4 OD	9405	7,500/-
RC380B LED36S-6500 IA W60L60 G4 OD	9405	7,500/-
RC380B LED30S-4000 IA W60L60 G4 OD	9405	6,500/-
RC380B LED30S-6500 IA W60L60 G4 OD	9405	6,500/-
BN308C LED40S-6500 L120 IA WH	9405	5,200/-
BN308C LED40S-4000 L120 IA WH	9405	5,200/-
Wireless Occupancy Sensor EasySmart	-	10,000/-
ZigBee Green Power Switch Dim	-	12,000/-
ProSite v20	-	1,00,000/-
ProSite v50	-	1,30,000/-
ProSite v100	-	1,50,000/-
ProSite v150	-	2,00,000/-
ProSite v200	-	2,50,000/-



Outdoor



Street Lights

SmartBright Street

High performance low wattage street light with Single Die ceramic base high power LED light source with IP66 protection, PDC housing with finless design and high impact resistance (IK08) Polycarbonate cover luminaire. Pole Dia : 32-40mm



Type	HSN Code	MRP (INR)
BRP042 LED 14 CW MR S1 PSU GR	9405	2,300/-
BRP042 LED 19 CW MR S1 PSU GR	9405	2,500/-
BRP042 P LED25 CW SLE S1 PSU GR P4210	9405	3,200/-

CCT Options of 3000K and 4000K. Add Rs. 200/- for SPD version.

SmartBright Street

High performance low wattage street light with Single Die ceramic base high power LED light source, IP66 protection, PDC housing with finless design and high impact resistance (IK08) Polycarbonate cover with integrated street Light optics. Pole Dia.: 32-40mm



Type	HSN Code	MRP (INR)
BRP046 LED 30 CW MR S1 PSU GR	9405	4,500/-
BRP046 LED 36 CW MR S1 PSU GR	9405	5,000/-
BRP046 LED 39 CW MR S1 PSU GR	9405	5,300/-

CCT Options of 3000K and 4000K. Add Rs. 300/- for SPD version.

SmartBright Street

High performance street light luminaire with Single Die ceramic base high power LED light source, IP66 protection, PDC housing & aesthetic finless design and toughened glass cover and street light optics for lighting of internal B2 category roads in cities. Pole Dia.: 32-40 mm



Type	HSN Code	MRP (INR)
BRP 052 LED 045 CW SLMR FG S1 PSU GR	9405	6,200/-

CCT Options of 3000K and 4000K.

SmartBright Street

High Performance street light luminaire having Single Die ceramic base high power LED light source, IP66 protection, PDC housing with Finless design and polycarbonate cover (IK08). The luminaire family comes with dedicated street Optics making it suitable for B2 Category roads. Pole Dia: 48-60mm



Type	HSN Code	MRP (INR)
BRP056 LED47 CW SLF PSU S1	9405	5,500/-
BRP056 LED53 CW SLF PSU S1	9405	5,650/-
BRP056 LED59 CW SLF PSU S1	9405	5,800/-

CCT Options of 3000K and 4000K. Add Rs. 400/- for SPD version.

SmartBright Street

High Performance street light luminaire having Single Die ceramic base high power LED light source, IP66 protection, PDC housing with Finless design and polycarbonate cover (IK08). The luminaire family comes with dedicated street Optics making it suitable for wide variety of road applications (A2 Category of Roads, Highways (Single/Multi Lane). Pole Dia.: 48-60mm



Type	HSN Code	MRP (INR)
BRP062 LED 65 CW SLA S1 PSU	9405	6,000/-
BRP062 LED 68 CW SLC S1 PSU	9405	6,000/-
BRP062 LED 82 CW SLA S1 PSU	9405	8,000/-
BRP062 LED 84 CW SLC S1 PSU	9405	8,000/-

CCT Options of 3000K and 4000K. Add Rs. 400/- for SPD version.



Skyline

Skyline Family is an IP66 road lighting luminaire with Single Die ceramic base high power LED light source, PDC housing with top openable access to drivers for ease of maintenance. Integrated optics ensure uniform distribution and higher efficacy thus offering higher spacing between poles and maintenance free system. Ideal for road width up to 8-12 mts. Pole Dia: 48-60mm



Type	HSN Code	MRP (INR)
BRP 340 LED 150 CW HO SLC S2 PSU GR	9405	14,000/-
BRP 340 LED 175 CW HO SLC S2 PSU GR	9405	16,000/-
BRP 340 LED 200 CW HO SLC S2 PSU GR	9405	18,000/-

CCT Options of 3000K and 4000K. Add Rs. 800/- for SPD version. Option available for 1-10V Dimmable driver. **Interact ready.**

Skyline Xtra

Skyline Xtra family is an IP66 road lighting luminaire with high power LED light source, PDC housing with top openable access to drivers for ease of maintenance. Integrated optics ensure uniform distribution and higher efficacy thus offering higher spacing between poles and maintenance free system ideal for road width up to 8-15 mts. (170W -235W). Pole Dia: 48-60mm.




Type	HSN Code	MRP (INR)
BRP360 LED 213 CW HO SLC S1 PSU GR	9405	24,000/-
BRP360 LED 240 CW HO SLC S1 PSU GR	9405	27,000/-
BRP360 LED 265 CW HO SLC S1 PSU GR	9405	29,900/-
BRP360 LED 295 CW HO SLC S1 PSU GR	9405	33,000/-

CCT Options of 3000K and 4000K. Add Rs. 800/- for SPD version. Option available for 1-10V Dimmable driver. **Interact ready.**

SmartBright Essential

SmartBright Essential is a street lighting luminaire with PDC housing and street light optics to ensure uniform distribution.



Type	HSN Code	MRP (INR)
BRP042 P LED25 CW SLE PSU GR DX	9405	3,000/-
BRP030 LED35 CW MR PSU GR DX	9405	3,500/-
BRP031 LED45 CW MR PSU GR DX	9405	5,000/-
BRP032 LED70 CW MR PSU GR DX	9405	7,000/-

GreenLine V2

GreenLine V2 is an IP66 road lighting luminaire with Single Die ceramic base high power LED light source, PDC housing, Toughened Glass cover and unique peanut lens to ensure uniform light distribution, higher spacing between poles and maintenance free system. Suitable for A1 and A2 category roads. Pole Dia : 48-60mm



Type	HSN Code	MRP (INR)
BRP409 LED115 CW SLC FG PSU GR V2	9405	9,400/-
BRP409 LED115 CW SLA FG PSU GR V2	9405	9,400/-
BRP409 LED130 CW SLC FG PSU GR V2	9405	10,200/-
BRP409 LED130 CW SLA FG PSU GR V2	9405	10,200/-

CCT Options of 3000K and 4000K. Add Rs. 400/- for SPD version. Option available for 1-10V Dimmable driver.

interact City

Full End-to-End Lighting management application.
Easy to install, use and expand.

Philips offer wide variety of street light luminaires with smart devices, enabled for integration on to Interact Platform. Product support wired and wireless architectures offered as part connected portfolio for cities.

Interact Ready street light options



BRP410
GreenLineV2



BRP340
Skyline



BRP360
Skyline Xtra



BRP322
GreenlineXtra



BRP371
Unistreet



BRP471
RoadCharm



Flood Lights

Uniflood

Uniflood is a flood lighting luminaire with Single Die ceramic base high power LED LED, PDC Housing and unique flood optics (NB) to ensure uniform distribution.



Type	HSN Code	MRP (INR)
BVP120 LED 35 CW FG S1 PSU GR	9405	7,500/-
BVP120 LED 70 CW FG S1 PSU GR	9405	13,500/-

CCT Options of 3000K and 4000K. Add Rs. 200/- for SPD version.

Tango Mini

Tango Mini is a flood lighting luminaire with Single Die ceramic base high power LED LED, PDC Housing and unique flood optics (NB) to ensure uniform distribution. maintenance free system, ideal for Area lighting, Billboard lighting and Mini mast lighting.



Type	HSN Code	MRP (INR)
BVP192 LED82 CW HO NB FG GR PSU	9405	10,000/-
BVP192 LED110 CW HO NB FG GR PSU	9405	12,000/-
BVP192 LED145 CW NB FG GR PSU	9405	20,000/-
BVP192 LED160 CW NB FG GR PSU	9405	22,000/-

CCT Options of 3000K and 4000K. Add Rs. 400/- for SPD version. Option available for 1-10V Dimmable driver.

Uniflood 2

Uniflood is a flood lighting luminaire with Single Die ceramic base high power LED LED, PDC Housing and unique flood optics(AMB,SY,NB) to ensure uniform distribution. Maintenance free systems Ideal for Industrial, Area, Recreational Sports - Outdoor & indoor Stadiums.



Type	HSN Code	MRP (INR)
BVP122 LED 124 CW HE AK55 FG XTFCL S4	9405	25,000/-
BVP122 LED 135 CW HE SY20° FG XTFCL S4	9405	25,000/-
BVP122 LED 135 CW HE NB FG XTFCL S4	9405	25,000/-
BVP122 LED 142 CW HE AK55° FG XTFCL S4	9405	28,000/-
BVP122 LED 150 CW HE SY20° FG XTFCL S4	9405	28,000/-
BVP122 LED 150 CW HE NB FG XTFCL S4	9405	28,000/-
BVP122 LED 170 CW HO NB FG FC S5 P4319	9405	28,000/-

CCT Options of 3000K and 4000K. Add Rs. 800/- for SPD version. Option available for 1-10V Dimmable driver.

Tango LED

"Best in class Lens Design & Optical integration" is a Flood lighting luminaire with Single Die ceramic base high power LED LED, PDC Housing & integrated flood optics (SWB, NB, AMB, SMB, SWB) to ensure uniform distribution maintenance free system, ideal for sports lighting, area lighting and high mast lighting.



Type	HSN Code	MRP (INR)
BVP483 LED185 CW SWB PSU GR	9405	19,000/-
BVP483 LED185 CW NB PSU GR	9405	19,000/-
BVP483 LED185 CW SMB PSU GR	9405	19,000/-
BVP483 LED185 CW AWB PSU GR	9405	20,000/-
BVP483 LED185 CW AMB PSU GR	9405	20,000/-
BVP483 LED210 CW SWB PSU GR	9405	21,000/-
BVP483 LED210 CW NB PSU GR	9405	21,000/-
BVP483 LED210 CW SMB PSU GR	9405	21,000/-
BVP483 LED210 CW AWB PSU GR	9405	22,000/-
BVP483 LED210 CW AMB PSU GR	9405	22,000/-
BVP483 LED235 CW SWB PSU GR	9405	25,000/-
BVP483 LED235 CW NB PSU GR	9405	25,000/-
BVP483 LED235 CW AWB PSU GR	9405	25,000/-
BVP483 LED235 CW AMB PSU GR	9405	25,000/-
BVP483 LED235 CW SMB PSU GR	9405	25,000/-

CCT Options of 3000K and 4000K. 10 KV SPD is provisioned. Option available for 1-10V Dimmable driver.

Interact ready.

TempoLED

TempoLED is a flood lighting luminaire with high power LED and unique flood optics to ensure uniform distribution and maintenance free system ideal for area lighting, high mast and billboard.



Type	HSN Code	MRP (INR)
BVP410 LED 245 CW HE NBW FG S4 XTFCL	9405	50,000/-
BVP410 LED 260 CW HE AK55 FG S4 XTFCL	9405	50,000/-
BVP410 P LED300 CW NB FG PSU SPD P4278	9405	54,000/-

CCT Options of 3000K and 4000K. 10 KV SPD is provisioned. Option available for 1-10V Dimmable driver. **interact ready.**

Tango LED - Double Decker

Tango LED - Double Decker with "Best in class Lens Design & Optical Integration" is a Flood lighting luminaire with Single Die ceramic base high power LED, PDC Housing with integrated flood optics (SWB, NB, AMB, SMB, SWB) to ensure uniform distribution and maintenance free system, ideal for sports lighting, area lighting and high mast lighting.




Type	HSN Code	MRP (INR)
BVP483 P LED185 X2 CW SWB PSU P4150	9405	56,000/-
BVP483 P LED185 X2 CW NB PSU P4151	9405	56,000/-
BVP483 P LED185 X2 CW AWB PSU P4152	9405	56,000/-
BVP483 P LED185 X2 CW AMB PSU P4153	9405	56,000/-
BVP483 P LED185 X2 CW SMB PSU P4154	9405	56,000/-
BVP483 P LED210 X2 CW SWB PSU P4145	9405	60,000/-
BVP483 P LED210 X2 CW NB PSU P4146	9405	60,000/-
BVP483 P LED210 X2 CW AWB PSU P4147	9405	60,000/-
BVP483 P LED210 X2 CW AMB PSU P4148	9405	60,000/-
BVP483 P LED210 X2 CW SMB PSU P4149	9405	60,000/-
BVP483 P LED235 X2 CW SWB PSU P4140	9405	65,000/-
BVP483 P LED235 X2 CW NB PSU P4141	9405	65,000/-
BVP483 P LED235 X2 CW AWB PSU P4142	9405	65,000/-
BVP483 P LED235 X2 CW AMB PSU P4143	9405	65,000/-
BVP483 P LED235 X2 CW SMB PSU P4144	9405	65,000/-

CCT Options of 3000K and 4000K. 10 KV SPD is provisioned. Option available for 1-10V Dimmable driver. **interact ready.**



Tango XL LED

Tango XL LED - with "Best in class Lens Design & Optical integration" is a Flood lighting luminaire with Single Die ceramic base high power LED, PDC Housing with integrated flood optics (AWB, FLNB, NB) to ensure uniform distribution and maintenance free system, ideal for Recreational sports lighting, area lighting and high mast lighting.



Type	HSN Code	MRP (INR)
BVP485 LED370 CW AWB PSU SPD GR	9405	57,200/-
BVP485 LED370 CW NB PSU SPD GR	9405	57,200/-
BVP485 LED427 CW AWB PSU SPD GR	9405	62,400/-
BVP485 LED427 CW NB PSU SPD GR	9405	62,400/-
BVP485 LED485 CW AWB PSU SPD GR	9405	70,200/-
BVP485 LED485 CW NB PSU SPD GR	9405	70,200/-
BVP485 LED540 CW AWB PSU SPD GR	9405	78,000/-
BVP485 LED540 CW NB PSU SPD GR	9405	78,000/-
BVP485 LED560 CW AWB PSU SPD GR	9405	83,200/-
BVP485 LED560 CW NB PSU SPD GR	9405	83,200/-

CCT Options of 3000K and 4000K. 20 KV SPD is provisioned. Dimmable 1-10V. **interact ready.**

Sportstar Gen2


Philips SportsStar Gen2 is a revolutionary innovative product for sports lighting, being one to one replacement to ArenaVision MVF403 2000W applications. Equipped with professional sports beam angle & complying with HDTV broadcasting requirement.



Type	HSN Code	MRP (INR)
BVP680 LED1620/957 1620W 230-400V S2	-	On request
BVP680 LED1620/957 1620W 230-400V S5	-	On request
BVP680 LED1620/957 1620W 230-400V S7	-	On request

ArenaVision LED Gen 3.5

The Philips ArenaVision LED floodlighting system is an innovative LED pitch-lighting solution supporting the latest TV broadcasting standards. Designed exclusively for sports and multi-purpose venues, ArenaVision LED offers outstanding light quality, effective thermal management, and long lifetime.



Type	HSN Code	MRP (INR)
BVP428 1560/957 PSU 220-400V BV S7 T40	-	On request
BVP428 1560/957 PSU 220-400V HGB S7 T40	-	On request

Tempo Mini

Tempo Mini is a flood lighting luminaire with PDC Housing and unique flood optics(NB) to ensure uniform distribution.




Type	HSN Code	MRP (INR)
BVP180 LED50 CW PC WB 50W 120-270 PSU	-	5,000/-
BVP181 LED62 CW PC WB 70W 120-270 PSU	-	7,000/-
BVP182 LED100 CW FG WB 100W 120-270 PSU	-	9,500/-

SmartBright Essential

SmartBright essential flood light is aesthetically designed flood lighting luminaire for superior performance.



Type	HSN Code	MRP (INR)
BVP140 P LED50 CW WB S1 PSU 50W MG P4287	-	5,000/-
BVP141 LED70 CW FG GR PSU	-	7,000/-
BVP142 LED100 CW FG GR PSU	-	9,500/-
BVP183 LED140 CW FG WB 150W PSU	-	14,000/-
BVP184 LED196 CW FG WB 200W PSU	-	18,000/-

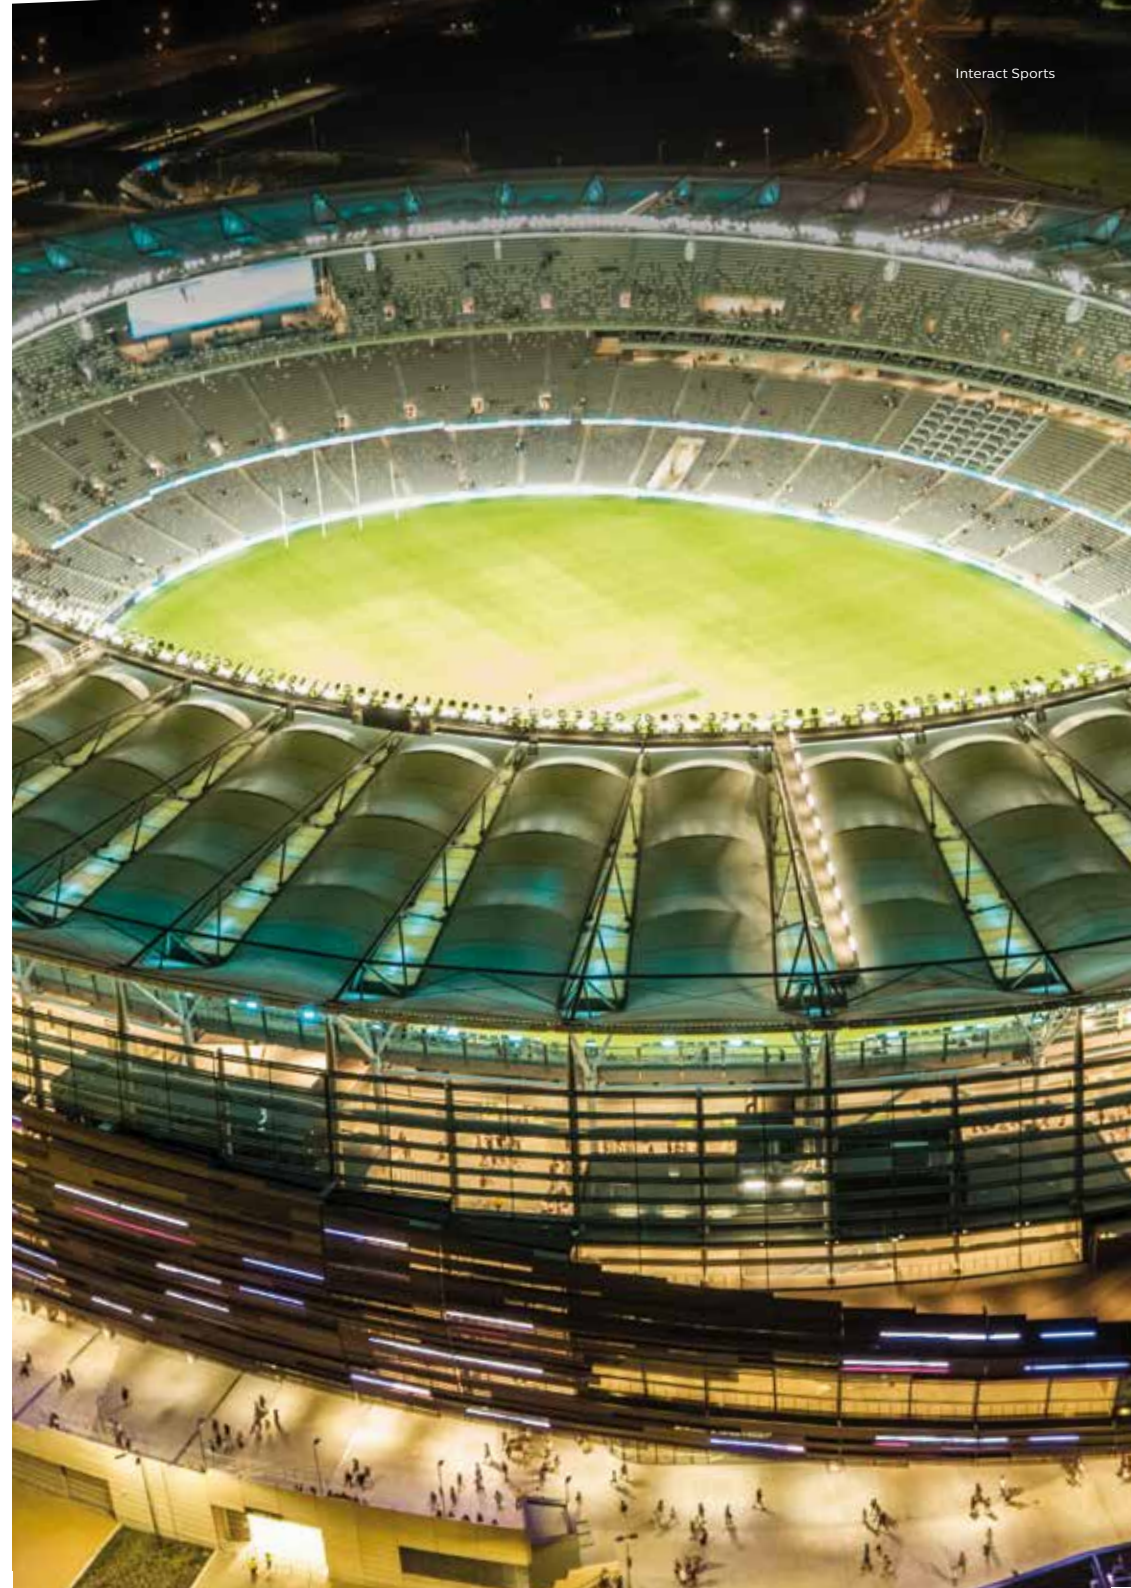

interact Sports

The Interact Sports dashboard and application suite collect and deliver unique data insights that help you manage both your venue and your audience as efficiently as possible.

Philips Offer wide variety of Flood light luminaires with smart devices ,Enabled for Integration on to Interact Sports Platform.
Product support Wired and Wireless Architectures offered as part connected portfolio for Sports Facilities

Interact Ready flood light options



BVP483
Tango



BVP483 DD
Tango DD



BVP410
Temp LED



BVP485
Tango XL



BVP621
Sportstar Gen1



BVP680
SportStar Gen II



AV 3.5
Arena Vision Gen 3.5



Landscape Lighting

Town Glow Post Top

Town Glow is a contemporary designer IP66/IK10 Post Top lantern with symmetric Light distribution.



Type	HSN Code	MRP (INR)
BGP300 LED28 757 PSU PC IN S1	9405	18,000/-
BGP300 LED40 757 PSU PC IN S1	9405	19,000/-
BGP300 LED50 757 PSU PC IN S1	9405	20,000/-

CCT options: 3000K and 4000K. Add Rs. 800/- for SPD version.

LED Post Top

Reliable and aesthetic designed IP65 post top lantern with symmetric light distribution and limited upward light component.



Type	HSN Code	MRP (INR)
BGP161 LED2500/NW PSU 220-240V 7043 IN	9405	20,000/-
BGP161 LED2300/WW PSU 220-240V 7043 IN	9405	20,000/-

City Cube Post Top

CityCube is a contemporary and sleek design IP66/IK08 Post top lantern with options of flat and drop diffuser for street light and area light distribution.



Type	HSN Code	MRP (INR)
BGP400 LED25 L CW PC S1	9405	37,500/-
BGP400 LED50 L CW PC S1	9405	43,000/-
BGP400 LED35 L CW MR FG S1	9405	37,500/-
BGP400 LED70 L CW MR FG S1	9405	43,000/-
BGP400 LED25 Y CW PC S1	9405	43,000/-
BGP400 LED50 Y CW PC S1	9405	48,000/-

CCT options: 3000K and 4000K.

CityCube Bollard U

CityCube Bollard is a robustly designed IP65/IK10 bollard and is easy to install with base plate.



Type	HSN Code	MRP (INR)
BCP400 LED04 U CW PSU GR S1	9405	10,000/-

CCT options 3000K and 4000K.

CityCube Bollard P

CityCube Bollard is a robustly designed IP65/IK10 bollard and is easy to install with base plate.



Type	HSN Code	MRP (INR)
BCP400 LED05 P CW PSU GR S1	9405	11,500/-

CCT options: 3000K and 4000K.

CityCube Bollard T

CityCube Bollard is a robustly designed IP65/IK10 bollard and is easy to install with base plate.



Type	HSN Code	MRP (INR)
BCP400 LED09 T CW PSU GR S1	9405	17,000/-

CCT options: 3000K and 4000K.

CityCube Bollard D


CityCube Bollard is a robustly designed IP65/IK10 bollard and is easy to install with base plate.



Type	HSN Code	MRP (INR)
BCP400 LED09 D CW PSU GR S1	9405	11,500/-

CityCube Wall Mount Horizontal/Vertical


CityCube wall mount is a contemporary and sleek design IP65/IK10 wall mount with symmetric light distribution.



Type	HSN Code	MRP (INR)
BWS400 LED05 H CW PSU GR S1	9405	6,000/-
BWS400 LED05 V CW PSU GR S1	9405	6,000/-

LED Bollard


Robustly designed IP65/IK10 bollard and is easy to install with base plate.



Type	HSN Code	MRP (INR)
BCP150 LED150/WW PSU 220-240V 7043	9405	11,500/-
BCP151 LED150/WW PSU 220-240V 7043	9405	12,000/-
BCP150 LED150/NW PSU 220-240V 7043	9405	11,500/-
BCP151 LED150/NW PSU 220-240V 7043	9405	12,000/-

LED Step Light

Robust design LED step-light is IP67/IK10, easy to install, maintain and comes with suitable mounting box.



Type	HSN Code	MRP (INR)
BWG150 LED50/WW PSU 220-240V IP67 7043	9405	7,000/-
BWG150 LED50/NW PSU 220-240V IP67 7043	9405	7,000/-

UNIIn-ground Range

UniIn Ground LED ground burial range is compact, robust design IP67/IK10 with aluminum diecast housing and stainless trim, IP67 waterproof connectors ensure easy installation & maintenance free.

UNIIn-ground: LED Marker

Compact design & Robust construction



Type	HSN Code	MRP (INR)
BBP210 LED50/WW 1W 12V 30D	9405	1,200/-
BBP211 LED90/WW 2W 12V 30D	9405	1,650/-

Driver & accessories price extra for 12 V. refer MI Sheet

UNIIn-ground: LED Ground Guide

Multiple lighting emission windows to make space out.



Type	HSN Code	MRP (INR)
BBP212 LED45/WW 3W 100-240V	9405	2,250/-
BBP213 LED110/WW 6W 100-240V	9405	3,200/-

UNIIn-ground: Ground Burial

Compact and robust design with diecast aluminum housing and stainless trim, IP68 waterproof connectors.



Type	HSN Code	MRP (INR)
BBP340 LED220/WW 3W 20D 100-240V	9405	5,000/-
BBP341 LED540/WW 6W 20D 100-240V	9405	7,200/-
BBP342 LED1200/WW 12W 20D 100-240V	9405	9,000/-
BBP343 LED1800/WW 18W 20D 100-240V	9405	13,500/-
BBP344 LED3600/WW 36W 20D 100-240V	9405	14,550/-
BBP343 LED RGB 18W 20D 24V	9405	15,000/-
BBP343 LED R 18W 20D 100-240V	9405	11,500/-
BBP343 LED G 18W 20D 100-240V	9405	11,500/-
BBP343 LED B 18W 20D 100-240V	9405	11,500/-

Driver and Accessories price extra for 24 V. refer MI sheet



UNI Urban

Type	HSN Code	MRP (INR)
BSP461 LED40 WW 110-277V TS	9405	On request
BSP461 LED40 WW 110-277V TA	9405	On request
BSP461 LED78 WW 110-277V TS	9405	On request
BSP461 LED78 WW 110-277V TA	9405	On request
BSP461 LED120 WW 110-277V TS	9405	On request
BSP461 LED120 WW 110-277V TA	9405	On request

CCT option: 4000K



UNI Urban

Type	HSN Code	MRP (INR)
BSS461 LED40 WW 110-277V CLASSIC	9405	On request
BSS461 LED78 WW 110-277V CLASSIC	9405	On request
BSS461 LED120 WW 110-277V CLASSIC	9405	On request



UNI Urban

Type	HSN Code	MRP (INR)
ZSP461 Screw-thread 370mm	9405	On request
ZSP461 Screw-thread 240mm	9405	On request
ZSP461 Screw-thread 70mm	9405	On request
Mandatory Accessory for BSS/BSP	9405	On request

ZCP461 Chess cover

Type	HSN Code	MRP (INR)
ZCP461 Chess cover	9405	On request
Mandatory Accessory for BSS/BSP	9405	On request



ZCP461 Dome cover

Type	HSN Code	MRP (INR)
ZCP461 Dome cover	9405	On request
Mandatory Accessory for BSS	9405	On request




UNI In-ground: Linelite

UNI In-ground Linear makes space distinctive with more safety and convenience of installation.

Type	HSN Code	MRP (INR)
BBP403 LED50/WW 2W 24V L300	9405	7,000/-
BBP403 LED RGB 9W 24V L300 GM	9405	9,500/-
BBP412 LED200/WW 7W 24V L1200	9405	13,500/-
BBP412 LED RGB 36W 24V L1200 GM	9405	17,500/-

Driver & accessories price extra for 12 V. refer MI Sheet



UNI Urban

UNI Urban is Decorative Street Light & Post top range with classic design & high performance with Aluminium Diecast housing having IP65/IK08 protection.

Type	HSN Code	MRP (INR)
BGP461 LED40 WW 110-277V TS	9405	On request
BGP461 LED40 WW 110-277V TA	9405	On request
BGP461 LED78 WW 110-277V TS	9405	On request
BGP461 LED78 WW 110-277V TA	9405	On request
BGP461 LED120 WW 110-277V TS	9405	On request
BGP461 LED120 WW 110-277V TA	9405	On request

CCT option: 4000K



UNI Urban

Type	HSN Code	MRP (INR)
BDP461 LED33 WW 110-277V TS	9405	On request
BDP461 LED65 WW 110-277V TS	9405	On request
BDP461 LED100 WW 110-277V TS	9405	On request



Jargeua - Post Top

Jargeau LED combines the heritage look of four-sided street luminaire with the technical performance of high-performance optics, Aluminium Die cast housing having IP65/IK08 protection.



Type	HSN Code	MRP (INR)
Jargeua -Post Top	9405	On request



Tunnel Lights

Flow Base

Flowbase is High performance IP66 Tunnel light with High Power LED light source, PDC housing with high impact resistance (IK08) . It comes with four sizes of configuration with mounting angle of 60 to -60 Degrees.Flowbase optics ensure uniform distribution and savings up to 50%* w.r.t conventional system and maintenance free system.



Type	HSN Code	MRP (INR)
BWP352 LED69/NW 60W 220-240V DM2 MP1	9405	On request
BWP352 LED137/NW 120W 220-240V DM2 MP1	9405	On request
BWP352 LED206/NW 180W 220-240V DM2 MP1	9405	On request
BWP352 LED274/NW 240W 220-240V DM2 MP1	9405	On request

Viaduct

LED Viaduct is High performance IP66 Viaduct light with High Power LED light source, PDC housing with high impact resistance (IK10). Viaduct optics ensure uniform distribution.



Type	HSN Code	MRP (INR)
BWP120-20W	9405	On request

10 KV SPD provisioned.



Architectural Lights



Blast*

This high-performance line of exterior luminaires offers an extremely wide range of light output, beam angles, and accessories.



Type	MRP (INR)
Intellihue Blast Gen4 Powercore, Clear Lens, White Housing, UL/Ce	On request
Intellihue Blast Gen4 Powercore, Clear Lens, Black Housing, UL/Ce	On request

Reach & Reach Compact*

Reach Powercore is ideal for illuminating large surfaces. Flood luminaires can throw fully-saturated light to great heights.



Type	MRP (INR)
ColorReach Powercore, GEN2, 100-277V, UL/CE	On request
ColorReach Powercore, GEN2, RGBW, 100-277V, UL/CE	On request
ColorReach Compact Powercore, 100-277V, UL/CE	On request
ColorReach Compact Powercore, RGBW, 100-277V, UL/CE	On request

ReachElite*

Go farther with powerful, precision-controlled light that reaches new heights.

ReachElite delivers exceptional light to bridges, façades, monuments, and skyscrapers—illuminating the tallest structures and highlighting details up to 564 m (1,852 ft) away with the 300 W luminaire. This family of long-throw exterior LED luminaires make it happen with high punch and rock-solid reliability.



Type	MRP (INR)
ReachElite Intellihue Powercore, 100W, 100-277V UL/CE/CQC	On request
ReachElite Intellihue Powercore, 200W, 100-277V UL/CE/CQC	On request
ReachElite Intellihue Powercore, 300W, 100-277V UL/CE/CQC	On request

* Also available in RGB/RGBW/RGBA/White version

Graze*

This high-performance linear exterior wall grazing family of luminaires offers high-quality light in a wide range of luminaire lengths, beam angles, output levels, and power consumption levels.



Type	MRP (INR)
ColorGraze Intellihue Powercore, 1ft, 9 Degree	On request
ColorGraze Intellihue Powercore, 4ft, 9 Degree	On request

Burst*

This family of high-output, exterior-rated LED lighting luminaires is designed for accent and site lighting. Most versions feature multiple housing colors and standard architectural and landscape formats.



Type	MRP (INR)
ColorBurst Intellihue Powercore, Black Housing, Architectural Mount	On request
ColorBurst Intellihue Powercore, White Housing, Architectural Mount	On request

* Also available in RGB/RGBW/RGBA/White version



Archipoint

ArchiPoint iColor Powercore is a daylight-visible, exterior-rated LED point of light ideally suited for a range of direct-view and beacon applications.



Type	MRP (INR)
ArchiPoint iColor Powercore, Translucent Dome Lens, 100-240V, UL/CE	On request
ArchiPoint iColor Powercore, Clear Flat Lens, 100-240V, UL/CE	On request

Flex

Cover almost any structure with flexible strands of bright LED nodes.

Flex means maximum flexibility. Strands of efficient, addressable Flex nodes can be arranged along a nearly limitless array of surfaces and unconventional structures. Our proven Flex family of direct-view LED luminaires can do it all—from displaying messages on curved building façades to bringing stunning LED light shows to stadium roofs.



Type	MRP (INR)
iColor Flex LMX GEN2, 4IN OC, white node/cable, clear flat lens, 3ft leader	on request
iColor Flex LMX GEN2, 12IN OC, white node/cable, clear flat lens, 3ft leader	on request
iColor Flex LMX GEN2, 4IN OC, white node/cable, translucent dome lens, 3ft leader	on request
iColor Flex LMX GEN2, 12IN OC, white node/cable, translucent dome lens, 3ft leader	on request

Accent Compact

This family of direct view linear LED luminaires is ideally suited for displaying large-scale video, graphics, and intricately designed effects.



Type	MRP (INR)
iColor Accent Compact, RGBW, Ethernet, 1.2M (4ft), Translucent Lens	On request
iColor Accent Compact, RGBW, Ethernet, 1.2M (4ft), Clear Flat Lens	On request

iColor MR Lamp

iColor MR Gen3 is an intelligent color-changing lamp that delivers intense, saturated bursts of color and color-changing effects. The stylish housing fits into most standard MR16 luminaires, including tracks, cables, rails, and pendants.



Type	MRP (INR)
iColor MR G3, 17 Degree	On request
iColor MR G3, 30 Degree	On request
iColor MR G3, 90 Degree	On request

Purestyle Compact**

Innovative PureStyle Compact Powercore luminaires bring lighting professionals high output in a compact, easily concealed luminaire. PureStyle Compact delivers exceptionally high-quality light for a wide range of interior applications from cove to wall-washing to backlighting and beyond. PureStyle Compact is designed for tight niches where color mixing directly out of the luminaire is important.



Type	MRP (INR)
Purestyle Compact, Intellihue, HO, 1ft	On request
Purestyle Compact, Intellihue, HO, 4ft	On request
Purestyle Compact, Intellihue, LO, 1ft	On request
Purestyle Compact, Intellihue, LO, 4ft	On request

** Also availbale in RGBW version

Controllers / Power Supplies / Keypads / Softwares



Type	MRP (INR)
Controller, VSM Pro SSD, DVI	On request
Controller, VSM Pro SSD, Composite	On request
Controller, Light System Manager (Gen 5) 15000 Node	On request
Controller, Iplayer 3/Colorplay 3, EU Cable	On request
Controller, Iplayer3 Serial Keypad, White	On request
Controller, Iplayer3 Aux Box, Universal Power	On request
Colordial Pro	On request
Ethernet Switch with POE Ports For Use with Colordial2	On request
Power Over Ethernet Injector W/ EU Line Cord	On request
Controller, iColor Communication Module	On request
iColor Player	On request
Controller, Smartjack Pro	On request
Multi-Protocol Converter	On request
Controller, Activesite Gateway	On request
AntumbraButton Ethernet Keypad Communication Module	On request
AntumbraButton Application Module-Facia (Ordered via Dynalite Codes)	On request




Uniflood

Uniflood C

UniFlood C is a circular shaped, exterior-rated architectural LED floodlight that is designed for façade, landscape and outdoor flood lighting applications like; illuminating multi-story exterior facades, bridges, landmarks and monuments. Available in white, monochromatic colors, RGB, RGBW and tunable white and DMX512/RDM control options.



Type	MRP (INR)
Uniflood C Compact (21W-27W)	On request
Uniflood C Small (27W-36W)	On request
Uniflood C Medium (50W-80W)	On request
Uniflood C large(110W-150W)	On request

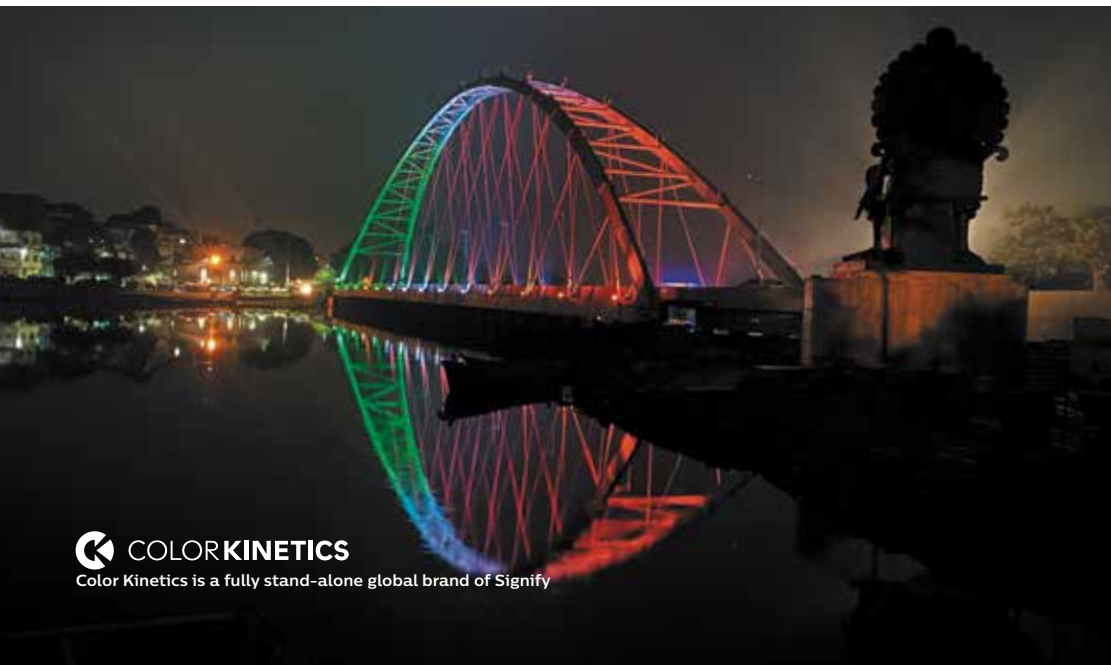

Uniflood M

UniFlood M is a modular, rectangular shaped exterior-rated architectural LED floodlight that is designed for façade, landscape and outdoor flood lighting applications like; illuminating multi-story exterior facades, bridges, landmarks and monuments. Available in white, monochromatic colors, RGB, RGBW and tunable white and DMX512/RDM control option



Type	MRP (INR)
UniFlood M Single Head (40W-144W)	On request
UniFlood M Double Head (160W-290W)	On request
UniFlood M Tripple Head (430W)	On request

Uniflood G

UniFlood G is a rectangular shaped exterior-rated architectural LED floodlight that is designed for façade, landscape and outdoor flood lighting applications like ; illuminating multi-story exterior facades, bridges, landmarks and monuments. Available in white, monochromatic colors, RGB, RGBW and tunable white and DMX512/RDM control option



Type	MRP (INR)
UniFlood G Single Head (120W-300W)	On request
UniFlood G Double Head (240W-600W)	On request

UniStrip G4


UniStrip G4 (AC) is a surface mounted, exterior-rated LED linear flood light luminaire that is designed for wall washing and grazing architectural lighting applications like; illuminating buildings facades, bridges, overpasses and any application that requires a linear lighting solution. Available in white, monochromatic colors, RGB, RGBW and tunable white with different lengths (300mm,500mm, 520m & 1000mm).



Type	MRP (INR)
UniStrip G4 AC BCP383(15W-50W)	On request
UniStrip G4 AC BCP384 (20W-80W)	On request
UniStrip G4 AC BCP385 (50W-120W)	On request

Make your landmark shine, with a swipe on your smartphone

Cloud-based control

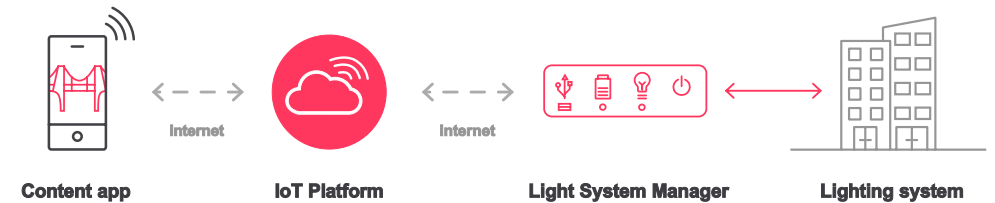

Terms & Conditions


- Please choose correct system configuration. (Only Philips Employees /Authorized Value Added Partners & System Integrators should be consulted).
- GST Extra as applicable in case of discounts considered on MRP.
- Warranty 1 year against manufacturing defects.
- Installation, Testing & Commissioning Extra as applicable.
- AMC available on request.
- Automatic Voltage Stabilizer & external SPD is MANDATORY for all Architectural lighting luminaires to claim the warranty
- The company reserves the right to discontinue / add new variants in the product range.



Signify offers a variety of Offgrid and Hybrid solar propositions catering to the needs of urban, semi-urban as well as rural communities.



Street Lighting
All-in-One



Street Lighting
High Lumen
Non-integral




Street Lighting
Low Lumen
Non-integral



City Beautification



Flood Lighting



PV Panel
subsystem



Combo Charge
controllers



Battery
subsystem




Indoor systems



Portable lanterns

Solar Lighting

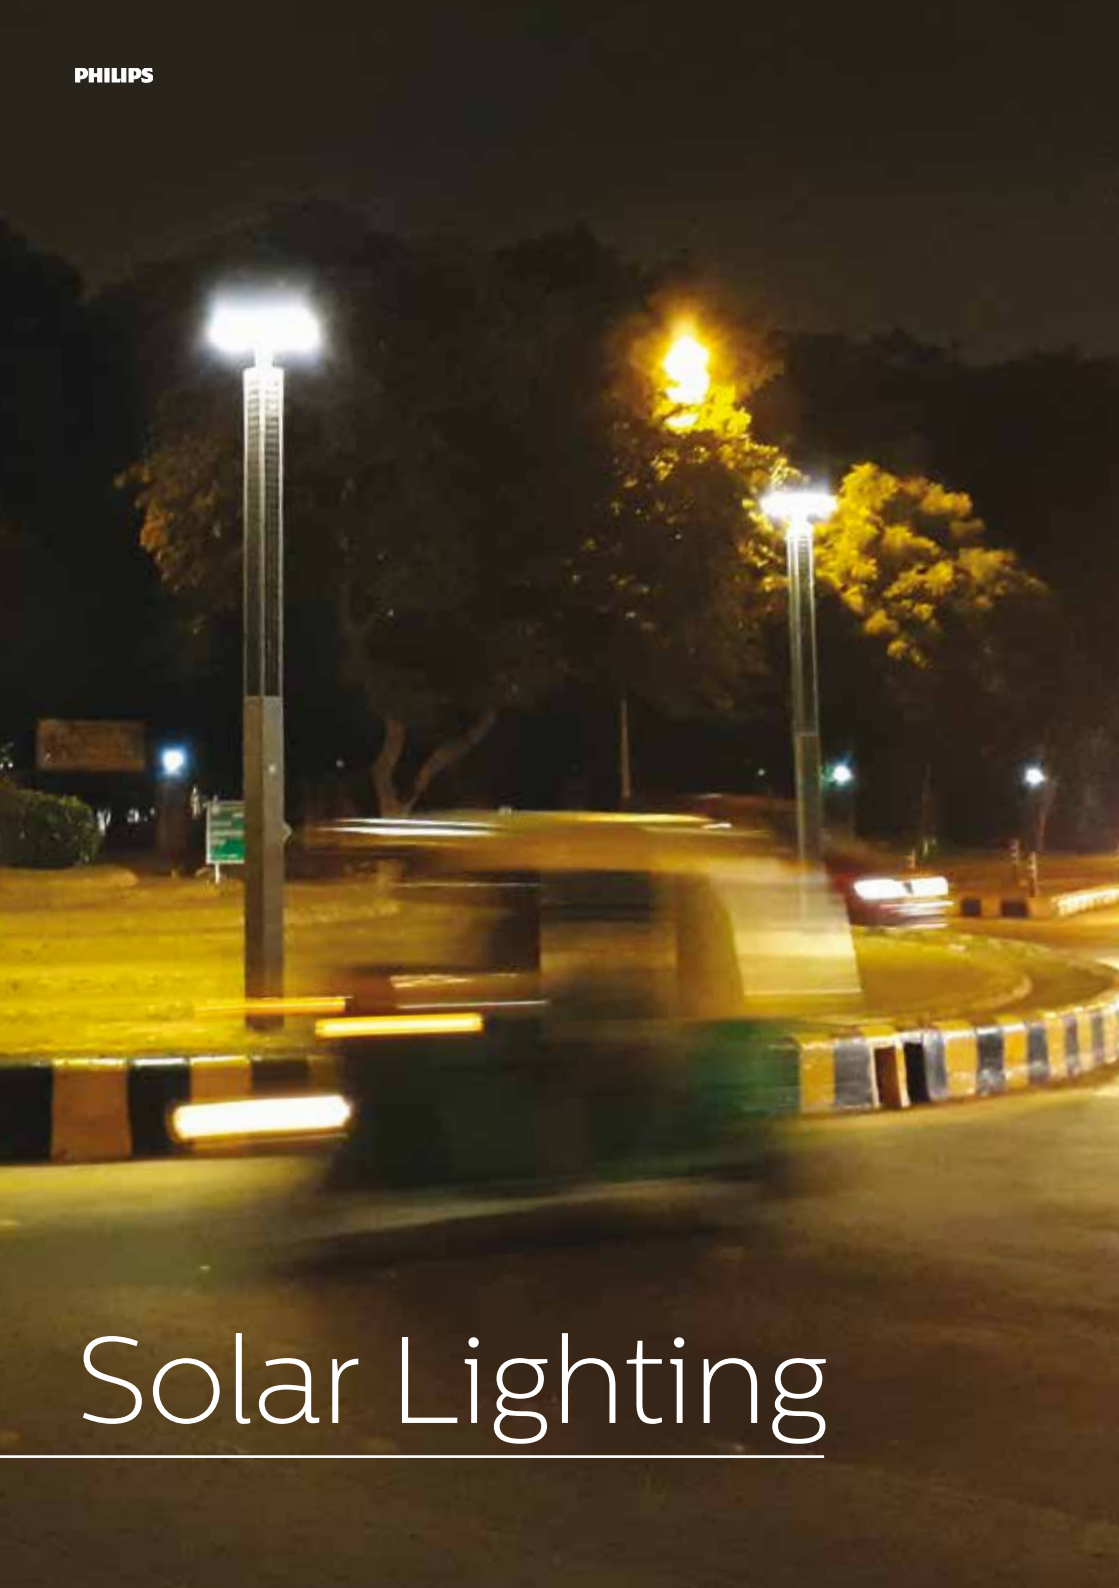

Standalone LED street lighting system

Ideal for remote, rural and sub urban locations with no electricity. Also suitable for different low wattage, offgrid, solar outdoor applications driven by clean energy initiatives.



SmartBright Solar: Street lighting range



Complete system comprises of Luminaire with inbuilt charge controller, Battery, PV Panel and pole and mounting accessories

Standalone solar lighting system from 900-2100 lumens 94055040 On request

* Actual product image may vary depending on the luminaire type / wattages.

GreenLine V2 Solar



Complete system comprises of configurable Luminaire with inbuilt charge controller, Battery, PV Panel and pole and mounting accessories

Standalone solar lighting system from 1600-5000 lumens 94055040 On request

* Actual product image may vary depending on the luminaire type / wattages.

Sunstay

Integrated all-in-one solar street light with Lithium Ferro Phosphate battery, solar panel and charger built into the luminaire. Pressure die cast aluminium for sturdiness and long life. Specially designed pole mounting bracket allows different tilt angles, lateral and pole top mounting. SunStay has highest ever system efficacy of more than 175lm/w.



Offgrid	HSN Code	MRP (INR)
BRP710 LED20 CW MR S1 12V LFP AIO Solar Equip IN - with Sensor	94055040	35,000/-
BRP710 LED30 CW MR S1 12V LFP AIO Solar Equip IN - with Sensor	94055040	49,000/-
BRP710 LED45 CW MR S1 12V LFP Solar IN - with Sensor	94055040	70,000/-

CCT option: 3000K and 4000K. Option available without sensor. Option available with fixed dimming profile.

Hybrid Sunstay powered by solar energy and at the same time connected to the electric grid. In case of abundant sunlight, it uses solar energy and otherwise it draws energy from the grid.



Hybrid	HSN Code	MRP (INR)
BRP710 LED20 CW MR HY SOLAR IN	94055040	42,000/-
BRP710 LED20 CW MR HY FDIM50 SOLAR IN	94055040	42,000/-
BRP710 LED30 CW MR HY SOLAR IN	94055040	56,000/-
BRP710 LED30 CW MR HY FDIM50 SOLAR IN	94055040	56,000/-
BRP710 LED45 CW MR HY SOLAR IN	94055040	77,000/-
BRP710 LED45 CW MR HY FDIM50 SOLAR IN	94055040	77,000/-
BRP710 LED60 CW MR HY FDIM20 SOLAR IN	94055040	85,000/-

CCT option: 3000K and 4000K

SmartBright All-in-one Solar Street Light

All-in-one Solar street light range up-to 12000 Lumen with inbuilt Lithium Ferro Phosphate batteries, Monocrystalline solar panel and MPPT charge controller



Offgrid	MRP (INR)
BRP110 LED50/757	72,000/-
BRP110 LED85/757	92,000/-
BRP110 LED120/757	1,60,000/-

LifeLight / LifeLight Plus

Solar lantern for offgrid communities with mobile charging facility and optional AC charging. By harnessing the abundant energy from the sun, these LED lanterns deliver free and clean lighting along with additional facility to charge mobile phones.



Type	HSN Code	MRP (INR)
Solar Lamp Life Light-WC with USB cable for AC charging	94055040	On request
Solar Lamp Life Light	94055040	On request
LifeLight Plus	94055040	On request

Urbanspark

Urbanspark is Integrated solar post top lantern with Lithium Ferro Phosphate battery with vertically mounted panels on all four sides to catch sunlight throughout the day. Choice of street light and post top optics.



Type	HSN Code	MRP (INR)
UrbanSpark post top with 4m integrated pole	94055040	On request
Urban spark with 6m integrated pole	94055040	On request

Gen 4.0 Solar standalone street light system: Offgrid and Hybrid

Complete range of configurable and connected solar street lights upto 24000 lumens. Suitable for major, intermediate and minor roads for new points as well as grid connected renovation projects.



Type	HSN Code	MRP (INR)
System Configurable Option upto 8000 Lumen :	94055040	On request
System Configurable Option upto 13000 Lumen	94055040	On request
System Configurable Option Upto 24000 Lumen	94055040	On request

Gen 4.0 Solar standalone Flood light system : Offgrid and Hybrid

Complete range of configurable and connected solar flood lights upto 15000 lumens. Suitable for major, intermediate and minor roads for new points as well as grid connected renovation projects.



Type	HSN Code	MRP (INR)
System Configurable Option upto 3000 Lumen	94055040	On request
System Configurable Option upto 8000 Lumen	94055040	On request
System Configurable Option Upto 12000 Lumen	94055040	On request
System Configurable Option Upto 15000 Lumen	94055040	On request



Solar Indoor System

Solar indoor system for communities without access to electricity or with unreliable power supply. By harnessing the abundant energy from the sun, these systems deliver free and clean power to multiple lamps and appliances enhancing the lifestyles of remote communities.



SIS COMPACT



SIS 30



SIS 200

Bright Sites

by Signify

Smart Poles for Smart Cities



BrightSites H-Series Slim Poles have all you need to improve your city in a single pole.

From enhanced broadband connectivity, surveillance cameras, environmental monitoring with IoT sensors, you can lead the transformation to a smarter, connected, safer and healthier city with the help of BrightSites H-Series Slim Poles.

How BrightSites benefits all



Elegant and multi-functional design BrightSites offer an elegant and aesthetically pleasing multi-functional H-Series Slim Poles. Available in various heights, colors, styles; they enable integration into any streetscape with optimal visual impact.



Digital pathway Using the ubiquity of a city's existing street lighting infrastructure, BrightSites H-Series Slim Poles deliver 4G/5G, Wi-Fi, fiber hubs, mm-wave wireless and option to accommodate wide range of IoT applications.



Easy deployment and scalability Municipalities and mobile network operators can deploy hundreds of smart poles as a standardized solution for cell sites with IoT solutions quickly and easily, making it possible to densify network capacity with a minimal disruption.



Energy Efficiency Signify LED lighting provides a cost-effective, low-maintenance alternative to traditional street lighting

BrightSites H-Series Slim Poles enable city-wide, future-proof wireless broadband networks by reusing the existing street lighting infrastructure.

BrightSites helps cities meet the needs of citizens, businesses, and visitors by delivering the faster, more available broadband connectivity that helps ensure non-stop access to their digital world. But it delivers these capabilities in an extremely smart, city-friendly solution that leverages the current urban infrastructure, improves efficiency and reduce costs.

Customization

U BrightSites H-Series Slim Poles are available in various heights, colors and styles, enabling integration into any streetscape with minimal visual impact. BrightSites H-Series Slim Poles come in standard heights ranging from 4 to 12 meters with flexibility to place the luminaire at different positions and heights on the pole in order to maintain a consistent illumination pattern on the streets.


Connectivity

BrightSites integrates small cell Wi-Fi radios and IoT providing high-speed, high-capacity wireless network access and the optimal urban network coverage that residents, businesses and visitors demand without cell towers, pole attachments or other visual clutter.

Proven Success

Innovative cities already rely on H-Series Slim Poles from Signify to deliver new services and value to residents, businesses and visitors.

For solutions & pricings detail contact Signify representatives

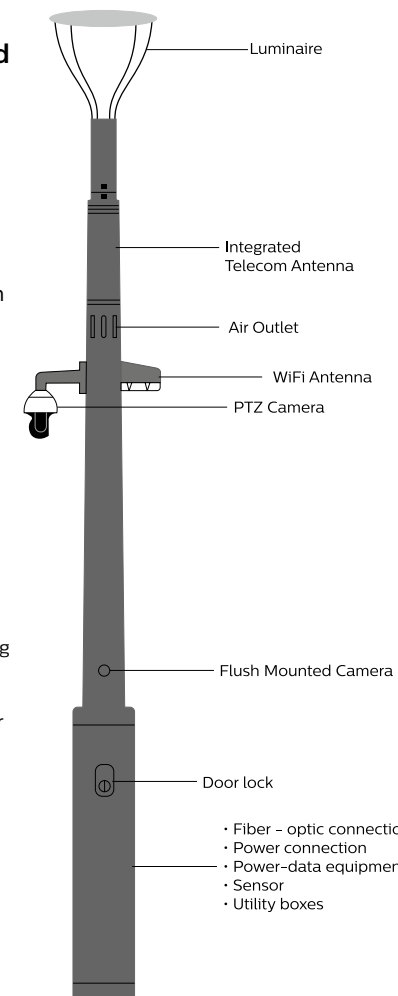

Lighting Controls



Philips Dynalite the intelligent choice

For Connected & Smart buildings, Dynalite is has been tried & tested as of the world's finest lighting control system in more than 30,000 projects. Philips Dynalite has implemented some of the largest and most extensive control networks around the globe. The same robust technology can be used in any application, on any scale.



ENERGY SAVINGS
Automatically detecting occupancy and available natural daylight allows the system to introduce energy savings



SETTING THE SCENE
Purely aesthetic management of a space.



EASE OF USE
User Interface that allows them to get access to such functionality



INTEGRATION
Ensuring multiple methods of two-way communication with 3rd party systems




SITE MONITORING
Reporting results and potential solutions via dashboard software.



EASY OF INSTALLATION
Din Rail Mounted/Wall Mounted controllers

Dynalite Ecosystem

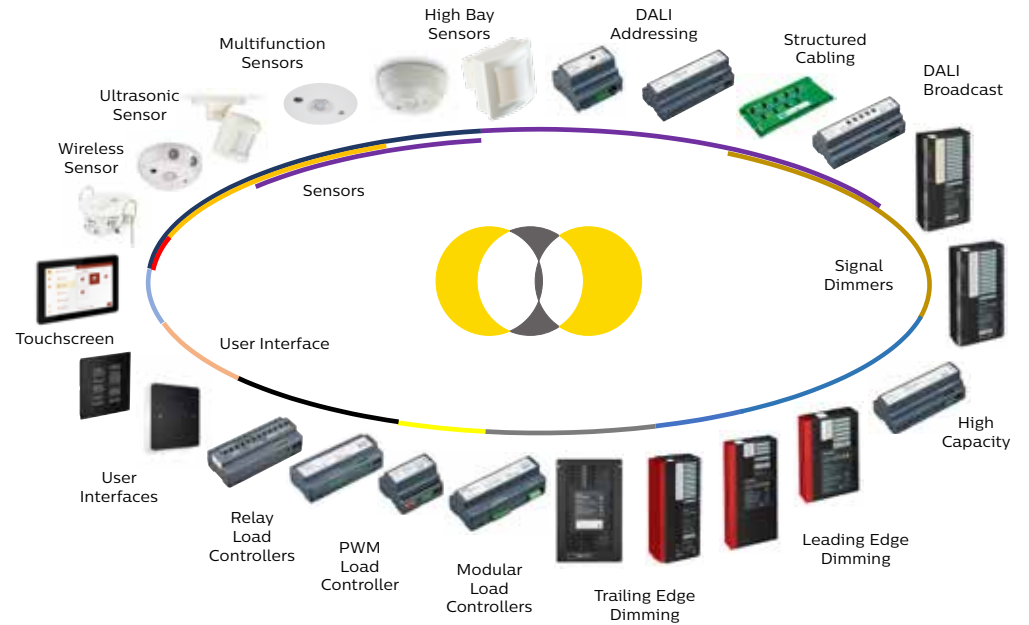

Multilingual-Integration



RS485

RS232



In-house Software Suite



System Manager

End user software & Dashboard



System Builder

Configuration & software tool



Control App

Mobile control

Standalone Controls

Occuswitch is a movement detector with a build-in switch. It will switch off the lights in a room or area when it is vacated and thus save energy. It can switch any load up to 6 A and control an office area of around 20 Sqm for small movement (e.g. desk work) and around 50Sqm for large movement (e.g. walking). It is smart daylight sensing technology offers additional saving through daylight override and daylight switching.



Type	MRP (INR)
LRM1071/10 - OccuSwitch Movement Detector	4,000/-
LRM1061/00 Occuswitch Surface Mount	4,500/-

Network Lighting Controls

Philips Dynalite creates sophisticated, reliable, and energy-efficient lighting control solutions for residential, offices, retail, hospitality, industry, stadiums, public spaces, and more.

Type	
DDBC120-DALI MultiMaster DALI Driver Controller	
DDBC320-DALI DALI Driver Controller	
DDBC516FR Signal Dimmer Controller	
DDRC420FR Relay Controller	
DDRC1220FR-GL Relay Controller	
DDLE802 Leading Edge Dimmer Controller	
DDMC802 Multipurpose Modular Controller	
DUS360CR Multifunction Sensor	
DUS804CS-UP Multifunction Sensor Ultrasonic	
DUS90AHB-DALI Multifunction Sensor -Aisleway high bay DALI network sensor	
SNS401CMP Wireless Group Controller	
Antumbra Button/ Touch/Display Keypad	
PDTS Networked Touchscreen	
PDEG Ethernet Gateway	
DDNG-BACnet BACnet Network Gateway	
PDZG-E ZigBee Gateway	
DLI18180 Dry Contact Interface	
DDFCUC010 Fan Coil Unit Controller	



Education

Setting the lighting to match the lesson



Hospitality

Monitoring power consumption and creating a lighting scenes



Boardroom control

Adjusting for meeting, presentation, discussion



Open office

In tune with occupancies natural Biorhythms

Terms & Conditions

- Price for network controls can be shared on request
- Please choose correct system configuration/Components for Network controls. (Only Philips Employees/Authorised Value Added Partners & System Integrators should be consulted).
- GST Extra as applicable in case of discounts considered on MRP.
- Warranty 1 year against manufacturing defects.
- Installation, Testing & Commissioning Extra as applicable.
- AMC available on request.
- The company reserves the right to discontinue/add new variants in the product range.

VERSACE

VERSACE

LED Lamp



Philips TrueForce LED Road

Philips TrueForce LED Road is the world's first direct (Plug&Play) replacement SON-T LED lamp for street lighting, making it easy to upgrade existing installations to LED without a need to rewire or change a luminaire. It is the simplest way to start saving on energy consumption and improve light quality, while keeping your initial investment low.



Type	HSN Code	MRP (INR)
TForce LED Road 58-35W E27 730	9290	On request
TForce LED Road 60-35W E27 740	9290	On request

Philips TrueForce LED Industrial and Retail Highbay Retrofit lamps

Philips TrueForce LED Industrial and Retail (Highbay - HPI/SON/HPL) lamps give you a quick and easy payback solution to replace HID lamps in Highbay application. The solution gives you the LED benefits of energy-efficiency and long-lifetime, plus they come for a low initial investment. Lamp design allows retrofit HID lamps with TrueForce LED lamps with no gear loss and high power factor. Multiple beam angle options and high color rendering index enhance the lighting distribution while creating a comfortable, safe and high productivity environment.



Type	HSN Code	MRP (INR)
TForce HB 100-85W E40 840 120D	-	7000/-
TForce HB 100-85W E40 865 120D	-	7000/-

Type	HSN Code	MRP (INR)
TForce HB 140W E40 840 NB GM	-	9,999/-
TForce HB 140W E40 840 WB GM	-	9,999/-
TForce HB 140W E40 865 NB GM	-	9,999/-
TForce HB 140W E40 865 WB GM	-	9,999/-

Philips TrueForce Core LED Industry and Retail (Highbay- HPI/SON/HPL) lamps

Philips TrueForce Core LED Industry and Retail (Highbay- HPI/SON/HPL) lamps give you a quick and easy payback solution to replace HID/CFLi lamps in industrial application. The solution gives you the LED benefits of energy-efficiency and long-lifetime, plus they come for a low initial investment. Lamp design allows to replace HID/CFLi lamps with no gear loss and high power factor.



Type	HSN Code	MRP (INR)
TForce Core HB 26-30W E27 830	-	On request
TForce Core 27W/3000lm B22	-	799/-
TForce Core 27W/3000lm E27	-	799/-
TForce Core HB 28-30W E27 840	-	On request
TForce Core 37W/4000lm B22	-	1,099/-
TForce Core 37W/4000lm E27	-	1,099/-
TForce Core HB 40-40W E27 840	-	On request
TForce Core HB 40-40W E27 865	-	On request
TForce Core 47W/5000lm B22	-	1,399/-
TForce Core 47W/5000lm E27	-	1,399/-
TForce Core HB 48-50W E27 830	-	On request
TForce Core HB 50-50W E27 840	-	On request
TForce Core HB 50-50W E27 865	-	On request
TForce Core HB 48-50W E40 830	-	On request
TForce Core HB 50-50W E40 840	-	On request
TForce Core HB 50-50W E40 865	-	On request
TForce Core HB 70-65W E40 840	-	On request
TForce Core HB 70-65W E40 865	-	On request
TForce Core HB 85-67W E40 865	-	-
TForce Core HB 90-80W E40 840	-	On request
TForce Core HB 90-80W E40 865	-	On request

Accessories for Tforce Core LED HID range



Type	HSN Code	MRP (INR)
TForce E27 lamp holder	-	1,000/-
TForce E40 lamp holder	-	1,100/-
TForce 12inch lamp reflector	-	1,450/-
TForce 16inch lamp reflector	-	1,800/-

True Force Post Top Lamps

Philips TrueForce LED lamps provide an easy LED solution with a fast payback to replace High-Intensity Discharge (HID) lamps. These lamps bring the energy efficiency and long lifetime benefits of LED to HID replacement, with a low initial investment delivering instant savings. With the right lamp size and light distribution, customers can easily retrofit TrueForce LED lamps into their existing system, thereby enhancing the light quality without having to change the fixtures or sacrifice the light effect.



Type	HSN Code	MRP (INR)
TForce LED HPL ND 44-33W E27 740 FR	-	3,499/-
TForce LED HPL ND 48-33W E27 740 CL	-	3,499/-

LED PL-L 18W

Cost effective and easy way to move to LED without changing the 2'x2' conventional fittings.



Type	HSN Code	MRP (INR)
LED PL-L 18W, 6500K 2G11	-	599/-

Essential LED spots MR16/GU10 Lamps

Essential LEDspots MR16/GU10 are compatible with most existing fixtures with a GU5.3 socket and are designed as a retrofit replacement for halogen spots. Essential LEDspots MR16/ GU10 deliver significant energy savings and minimize initial investment.



Type	HSN Code	MRP (INR)
ESS LED MR16 4.5-50W 36D 830 100-240V	-	299/-
ESS LED MR16 4.5-50W 36D 865 100-240V	-	299/-
Essential LED 4.6-50W GU10 827 36D	-	299/-
Essential LED 4.6-50W GU10 830 36D	-	299/-
Essential LED 4.6-50W GU10 865 36D	-	299/-

Master LEDspot ExpertColor MV range

MASTER LEDspot MV ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. It creates ambience with superior lighting that has a customised spectrum, high CRI and deep dimming features. The result being a beautiful lighting experience. The innovative, trimless lens design will also suit almost any interior decor with its clean and neat look. In addition, you can take advantage of the full ExpertColor family, which also includes LEDspot LV and LEDspot Par lamps.



Type	HSN Code	MRP (INR)
MAS LED MR16 ExpertColor 7.2-50W 927 10D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 930 10D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 940 10D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 927 24D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 930 24D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 940 24D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 927 36D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 930 36D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 940 36D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 927 60D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 930 60D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 940 60D	-	1,699/-
MAS LED ExpertColor 5.5-50W GU10 927 24D	-	999/-
MAS LED ExpertColor 5.5-50W GU10 930 24D	-	999/-
MAS LED ExpertColor 5.5-50W GU10 927 36D	-	999/-
MAS LED ExpertColor 5.5-50W GU10 930 36D	-	999/-

LED GU10 Kits

LED GU10 KITS are a perfect for spot lighting and deliver warm halogen-like light



Type	HSN Code	MRP (INR)
LED 50W GU10Kit_R 827 36D	-	470/-
LED 50W GU10Kit_R 840 36D	-	470/-
LED 50W GU10Kit_R 865 36D	-	470/-
LED 50W GU10Kit_S 827 36D	-	470/-
LED 50W GU10Kit_S 840 36D	-	470/-
LED 50W GU10Kit_S 865 36D	-	470/-

Essential LED spots MR16/GU10 Lamps

Essential LEDspots MR16/GU10 are compatible with most existing fixtures with a GU5.3 socket and are designed as a retrofit replacement for halogen spots. Essential LEDspots MR16/ GU10 deliver significant energy savings and minimise initial investment.



Type	HSN Code	MRP (INR)
ESS LED MR16 4.5-50W 36D 830 100-240V	-	299/-
ESS LED MR16 4.5-50W 36D 865 100-240V	-	299/-
Essential LED 4.6-50W GU10 827 36D	-	299/-
Essential LED 4.6-50W GU10 830 36D	-	299/-
Essential LED 4.6-50W GU10 865 36D	-	299/-

Master LEDspot LV (Dimmable & Non Dimmable)

Delivering intense accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot lighting. MASTER LEDspot LV is designed to replace halogen or incandescent spots. It realises natural colors, enables cozy and comfortable ambience for residential, hospitality and emphasises the beauty of merchandise in retail. New smaller housing provides perfect fitting with majority of luminaires in a market with a MR16 GU 5.3 holder. It not only employs Philips' patented solution to guarantee the broadest possible compatibility with standard 12V halogen electronic transformers, it also delivers high beam intensity which is equivalent to halogen MR16 spots. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers. Its high SDCM ensures stricter color consistency, that is maintained over product life. MASTER LEDspot LV delivers huge energy savings and minimises maintenance cost without any compromise on light quality and lifetime, enabling residential and business owners to achieve a return on their investment within short period time.



Type	HSN Code	MRP (INR)
MASTER LED 7-50W 927/930/940 MR16 15D/24D/36D Dim	-	1,379/-
MASTER LED 8-50W+ 827/830 MR16 24D/36D Dim	-	1,499/-
MASTER LED 4-35W 2700/3000K MR16 24D/36D	-	399/-
MASTER LED 5.5-50W 2700/3000/4000K MR16 24D/36D	-	499/-
MASTER LED 6.5-50W 927/930/940 MR16 24D/36D	-	799/-
Master LED 5-50W GU10 927/930/940 36D Dim	-	599/-



LED lamps

MAS LEDspot LV AR111

With its new perfect-fit design, the Master LEDspot LV AR111 now works with most of G53 luminaires as a true retrofit solution. The lamp creates a brilliant visual effect for retail and hospitality applications such as shops, showrooms and galleries. The high quality light brings out the true colors in merchandise and emphasises its beauty. It also lasts long, with a strong lumen and color maintenance. The beautifully designed lamp offers a well-defined beam with a multitude of beam angles to suit various applications. Not only does it employ the Philips patented solution to ensure it is compatible with a broad selection of standard 12V halogen electronic transformers, it also delivers high beam intensity which is equivalent to halogen AR111 spots of 50W, 75W or 100W.



Type	HSN Code	MRP (INR)
MAS LEDspotLV D 11-50W 927/930 AR111 8D/24D/40D	-	1,999/-
MAS LEDspotLV D 15-50W 927/930 AR111 8D/24D/40D	-	2,499/-
MAS LEDspotLV D 20-50W 927/930/940 AR111 8D/24D/40D	-	2,999/-

Master LED PAR30L

Philips PAR30S LED Single Optic Lamps with AirFlux Technology provides superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.



Type	HSN Code	MRP (INR)
Master LED PAR30L 20W 15D/30D 830/840	-	1,299/-
Master LED PAR30L 32W 15D/30D 830/840/857	-	1,999/-
Master LED PAR30L 40W 15D/30D 827/830/840/857	-	1,999/-



Master LEDtube Range	HSN Code	MRP (INR)
Mas LEDTube 9W, 900lm, 865 T8	8539	-
Mas LEDtube 1200mm, 13W865 T8 I IN30 - 1600lm	8539	700/-
Mas LEDtube 18W, 2100lm 865 T8 (VE)	8539	800/-
Mas LEDtube 1200mm 18W865 T8 I - 2100lm	8539	800/-
Mas LEDTube 18W 2100lm Kit with Batten	8539	-
Master LEDtube 1200mm 18W865 TEX	8539	800/-
Mas LEDtube 18W, 865 T8 I - 1800lm	8539	700/-
Master LEDTube 1200 mm 18W 840 T8 I W	8539	-
Mas LEDTube 30W, 4000lm, 865 T8	-	1,300/-
Mas LEDTube 30W, 4000lm, 865 T8 with Batten	-	1,500/-

Sensor LEDtube

LEDtube with microwave based Sensor Chip. Detection Range - 5m radius @ 2.5m ht



Retrofit LED tube range	HSN Code	MRP (INR)
Sensor LEDtube 1200mm 1600lm 14W840	-	2,250/-
Sensor LEDtube 1200mm 1600lm 14W860	-	2,250/-

MasterConnect LEDtube

Philips MasterConnect LEDtube EM/Mains T8 means easy upgrade to a connected lighting system. Its 2.4GHz mesh networking technology enables wireless integration with a variety of control devices, such as sensor and switch. The result? Even more energy saving and enhanced flexibility in your space. Through dimming, occupancy sensing and/or daylight harvesting, lamps deliver up to 85% energy saving thanks to MasterConnect technology.



Master LEDtube Range	HSN Code	MRP (INR)
MAScon LEDtube IA 1200mm UO 16.5W830 T8 - 2300 lm	-	3,700/-
MAScon LEDtube IA 1200mm UO 16.5W840 T8 - 2300 lm	-	3,700/-
MAScon LEDtube IA 1200mm UO 16.5W865 T8 - 2300 lm	-	3,700/-

LEDtube range

LED tube range integrates LED light source with frosted cover design into traditional linear fluorescent form delivering 50%* energy saving.



Essential LEDtube Range	HSN Code	MRP (INR)
Essential LEDtube 1200mm 20W865 T8 IND I - 2100lm	8539	400/-
Essential Led tube 20W B2B 865 T8	8539	450/-



Abbreviation

1. Product family code

SP780P | RC380B | DN295B | RS271B
ST391T | BY325P | BN308C | BRP409
| BVP621 | BGP400 | BRP710

2. System output

LED100S: 10,000 Lumen
LED130S: 13,000 Lumen
LED160S: 16,000 Lumen

3. Color temperature

CW/CDL: 6500K/5700K
NW:4000K
WW:3000K

4. Optics (Indoor)

NB: Narrow Beam 60°
WB: Wide beam 110°
SK: Symmetric beam
AK: Asymmetric beam

5. Optics (Outdoor Product)

MR: Optics for Main Road
NR: Optics for Narrow Road
SLA: Street Light Optics A Class
SLC: Street Light Optics C Class
SWB: Symmetric Wide Beam
AWB: Asymmetric Wide Beam
NB: Narrow Beam
SY20: Symmetric beam 20 Degree
AK: Asymmetric Beam

6. Optics (Retail)

NB: Narrow Beam
MB: Medium Beam
WB: Wide Beam

7. Controls

PSU: Fixed output
PSD: DALI Dimmable
PSR: 0-10 Analog Dimmable

8. Phase:

1C: Single Circuit
3C: Triple Circuit

9. Variant

V1: Version 1
V2: Version 2

10. Width (Appx. Dimension)

W6: 60mm Width
W7: 70mm Width
W30: 300mm width
W60: 600mm width

11. Length (Appx. Dimension):

L120: 1200mm length
L60: 600mm Length
L30: 300mm length
L1000: 1000mm length
L2000: 2000mm length

12. Front Cover

FG: Toughened Extra clear flat glass
PC: Polycarbonate cover
OD: Opal diffuser
OA: Opal Acrylic

13. Luminaire Color

SI: Silver color
GR: Grey color
WH: White color
BK: Black color



South

CHENNAI

Signify Innovations India Limited
3rd Floor, C-Block, Sunny Side, Shafee
Mohammed Road, Off Greams Road
Chennai - 600 006
Tel: 044 66074000/4020

BANGALORE

Signify Innovations India Limited
Mfar Greenheart, Level 7, Manyata Tech
Park, Hebbal Outer Ring Road,
Bangalore - 560045
Tel: 080 67819730

HYDERABAD

Signify Innovations India Limited
Level 1, MB Towers, Road No 10,
Banjara Hill, Hyderabad - 500034
Tel: 040 46464828

East

KOLKATA

Signify Innovations India Limited
22 Camac Street, Block B, 6th Floor
Kolkata - 700016
Tel: 033 66297000

West

MUMBAI

Signify Innovations India Limited
Boomerang, B2 Wing,
5th Floor, Unit No. 506,
Chandivali Farm Road,
Near Chandivali Studio,
Andheri (East), Mumbai - 400072
Tel: 91 22 6691 2000

AHEMDABAD

Signify Innovations India Limited
Flexi Business Hub
201, 2nd floor, Madhu complex,
Opposite Gwalia sweet,
Near sardar patel Stadium,
Navrangpura, Ahmedabad,
Gujarat - 380009
Tel: 9375239966

North

GURGAON

Signify Innovations India Limited
9th Floor, DLF - 9B, DLF Cyber City
DLF Phase 3, Gurgaon - 122002
Tel: 91 124 460 6000

For any lighting service request you can reach out through

TollFree Number: 1800 103 5977

SMS: Send 'COMP' to 56363 - Our representative will call back

Email: lighting.india@philips.com or

Chat & Mail: www.lighting.philips.co.in - Support/Contact us/Chatnow/Email



© 2019 Koninklijke Philips N.V. All rights reserved.
Reproduction in whole or in part is prohibited. Owing to continuous
innovation and improvement, Philips India reserves the right to make
changes in the data/details without prior notice. Care has been taken to
ensure that the information contained within is correct.